


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEETS THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. CLIPPED A-B / B-A, RECONFIGURABLE.
7. ADHESIVE LINED HEAT SHRINK.
8. ADHESIVE LINED HEAT SHRINK FOR STRAIN RELIEF.
9. LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR.

- 9.1. LINE 1: PART NUMBER.
- 9.2. LINE 2: LENGTH.
- 9.3. LINE 3: SEQUENTIAL NUMBER.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/30/2016	A.J.

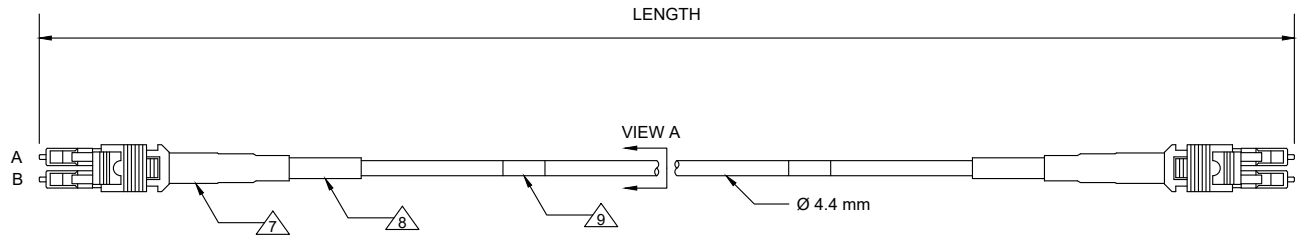

VIEW A
CROSS SECTION
NOT TO SCALE

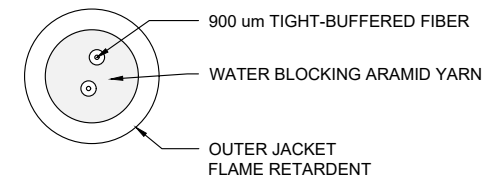

SINGLEMODE OS2 OFNP IN/OUT CABLE	
COMPLIANT:	NFPA262 UL RATED OFNP ITU-T G.657.A1
OPERATING ENVIRONMENT:	-40°C TO +70°C
APPLICATION:	INDOOR / OUTDOOR DUCT
LC DUPLEX UPC POLISH UNIBOOT CONNECTOR	
COMPLIANT:	TELCORDIA GR-326 TIA 604
FIBER TYPE:	SINGLEMODE
OPERATING ENVIRONMENT:	-40°C TO +85°C
CONNECTER DURABILITY:	500 MATINGS

DRAWN BY:	K. THOMAS	06/27/2016
APVD BY:	A. JENSEN	06/30/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

BILL OF MATERIALS			TEST LIMITS AT 1310 nm				DIMENSIONS: METRIC [IMPERIAL]		TITLE: SM OFNP IN/OUT 2 FIBER LC UNIBOOT		
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	SIZE	DWG. NO.	REV		
3	2	LABEL					A	SUPO02LSLSXLXPX	A		
2	AR	SINGLE-MODE OS2 OFNP IN/OUT CABLE; BLACK					SCALE: NOT TO SCALE		SHEET 1 OF 1		
1	2	LC-DUPLEX UNIBOOT UPC POLISH, RECONFIGURABLE; BLUE HOUSING	<=0.50dB	0.20dB	>=50dB	60dB	PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.				