


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-B.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. INDIVIDUALLY BAGGED.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	04/20/2016	A.J.

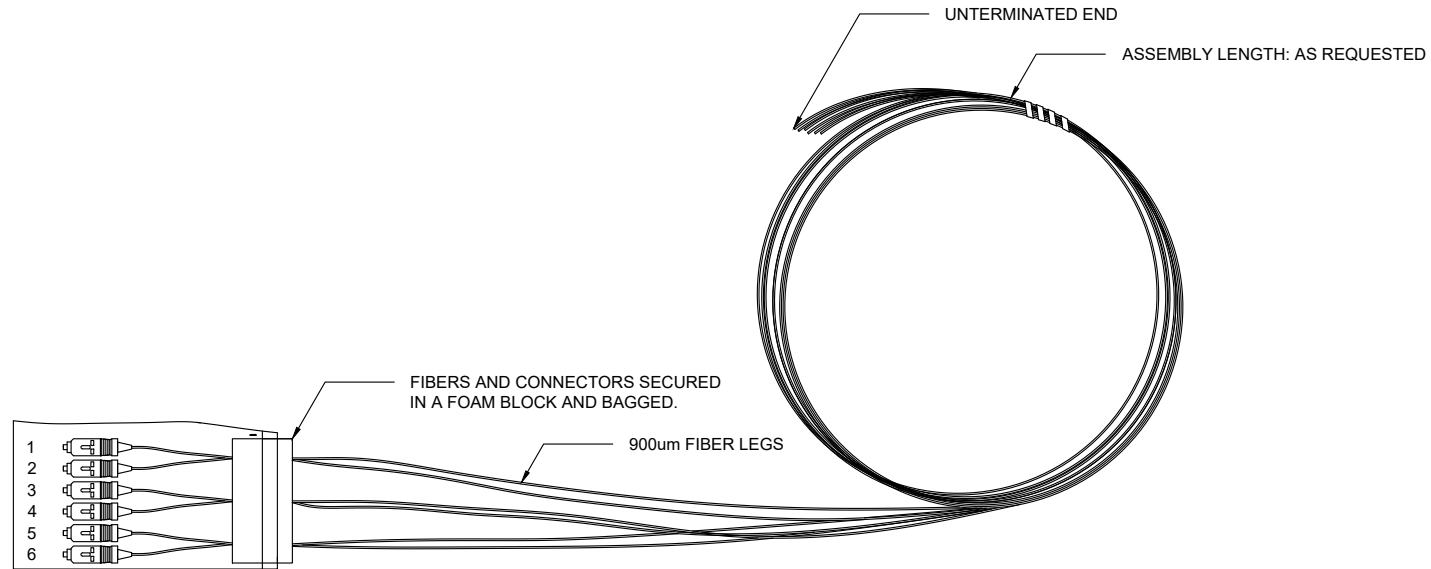

FIBER LEG COLOR

1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GREY
6	WHITE

SC PC POLISH PERFORMA CONNECTOR	
FIBER TYPE:	MULTIMODE 62.5um
CONNECTION DURABILITY:	500 MATINGS
OPERATING ENVIRONMENT:	-40°C to +85°C

BILL OF MATERIALS

ITEM	QTY	COMPONENT
2	AR	MULTIMODE OM1 OFNR DISTRIBUTION CABLE, STANDARD FIBER COLORS: PERFORMA
1	6	SC-UNCLIPPED PC POLISH; BIEGE HOUSING, BLACK BOOT: PERFORMA

TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.75dB	0.20dB	N/A	25dB

DRAWN BY:	K. THOMAS	04/20/2016
APVD BY:	A. JENSEN	04/20/2016



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]
PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE:	MPBP06SBXXXXXPI	
SIZE	DWG. NO.	REV
A	MPBP06SBXXXXXPI	A
SCALE: NOT TO SCALE		SHEET 1 OF 1