
NOTES: UNLESS OTHERWISE SPECIFIED


- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. STANDARD ASSEMBLY DESIGN DEPICTED.
- 7. REFER TO SALES FOR DESIGN OPTIONS.

8 FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR.

9 C-BREAK

10 HEAT SHRINK FOR STRAIN RELIEF



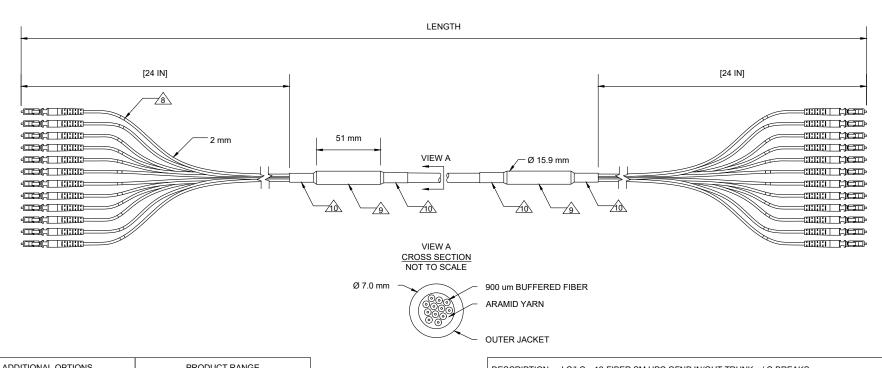

ADDITIONAL OPTIONS					PRODUCT RANGE					DESCRIPT	ION: LC/LC x 12-	FIBER SM U	PC OFNE	P IN/OUT TRUNK w/ C-BREAKS		
PULLING EYE			STAGGER	PERFORMA	PERFORMANCE COMPONENTS	İ			DDAMA!							
LABELS			TEST REPORT	SUPRA	CORNING CABLE					DRAWN BY:	K. THOMAS	11/08/2016			C ENTERPRIS	
BREAKOUT LENGTH		ENGTH	SPOOLED	ULTRA	CORNING COMPONENTS				-			-	-		2445 CADES WAY VISTA CA 92081	
BILL OF MATERIALS									APVD BY:	A. JENSEN	11/10/2016	C.EIAI EVLVIDED		760-599-5111		
ITEM	QTY COMPONENT				TEST LIMITS AT 1310 nm			DIMENSIONS: METRIC [IMPERIAL]		TITLE: IN/OUT LC/LC SM 12 FIBER 2 mm						
3	2 C-BREAK 2: SINGLE LEG BREAKOUT: YELLOW FURCATION TUBES					A1 13101IIII				TITLE:	IN/OUT LC/LC SIVI	12 FIBER 2	mm			
		S. S. L. L. C. S. L. S. C. S. L. L. C. S. T. T. C. C. T. G. C. T. G. C. T. C.					MAX. TYP.		TYP.	PROPRIETARY AND CONFIDENTIAL		SIZE	DWG. NO.		REV	
2	AR	AR SINGLE-MODE OS2 IN/OUT OFNP CABLE; BLACK: PERFORMA					I.L.	R.L.	R.L. R.L.		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES, NOT TO BE		Α	SUPO12LBLBF		Α
1	24	LC SINGLE-MODE UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA				<=0.50dB	0.20dB	>=50dB	60dB	USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.				SCALE: NOT TO SCALE	SHEET 1	OF 1