

NOTES: UNLESS OTHERWISE SPECIFIED



1. C-BREAK 4: TWO FIBERS IN ONE FURCATION TUBE.
 - 1.1. FOR USE WITH TWO FIBER CONNECTORS.
2. C ENTERPRISES ENGINEERING STANDARDS APPLY.
3. WHEN PULLING EYE REQUESTED, CONNECTORS AND SUBUNITS WILL BE STAGGERED BY DEFAULT.
 - 3.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 3.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
4. DEFAULT POLARITY TYPE A-B / B-A. A-A / B-B AVAILABLE UPON REQUEST.
5. LC UNIBOOT SHOWN FOR REFERENCE ONLY.
6. LABEL LEG NUMBER.
7. 900 um TIGHT-BUFFERED FIBERS TO BE USED ONLY IN 3 mm FURCATION TUBE.
8. C-BREAK. SEE TABLE 3 FOR OVERALL DIAMETER.
9. HEAT SHRINK FOR STRAIN RELIEF.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
B	-	DRAWING FORMAT CHANGE & NOTES UPDATE. BLOCK UPDATE.	K.T.	05/11/2016	A.J.
B.1	-	STAGGERED END ADDED.	K.T.	06/21/2016	A.J.


TABLE 1 BREAKOUT LENGTH	
12 in	
18 in	
24 in [DEFAULT]	
36 in	
48 in	
1 M	
CUSTOM	

TABLE 2 C-BREAK LENGTH	
250 um COATED FIBERS	
LENGTH	FIBER COUNT
1-1/2 in	2-4
2 in	6-12
3 in	16-36
4 in	48+
900 um TIGHT-BUFFERED FIBERS	
1-1/2 in	2
2 in	4-12
3 in	16-18
4 in	20+

TABLE 3 C-BREAK OVERALL DIAMETER		
FIBERS	2 mm	3 mm
2-8	DIMENSIONED BEST FIT	
12	5/8 in	5/8 in
16	5/8 in	3/4 in
24	3/4 in	3/4 in
36	7/8 in	1 in
48	TBD	1-1/8 in
72	1-1/8 in	1-1/8 in

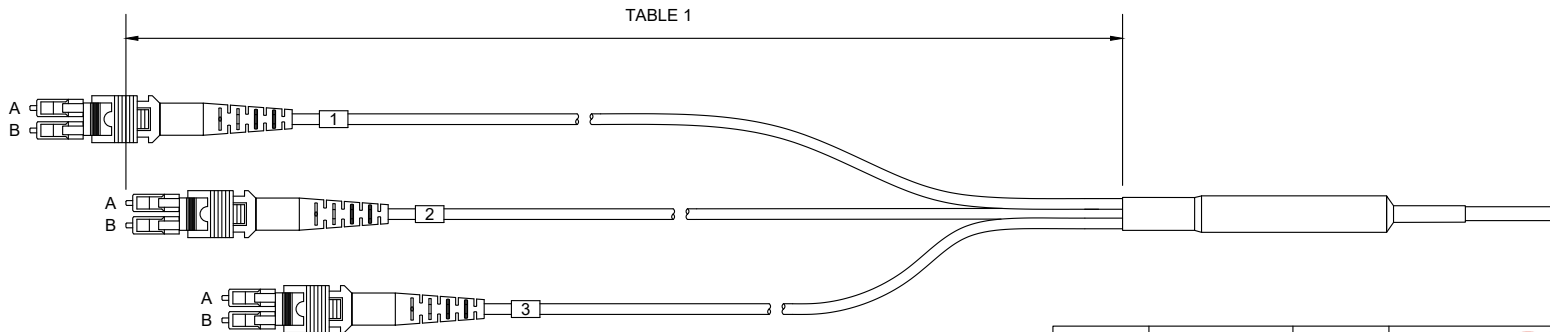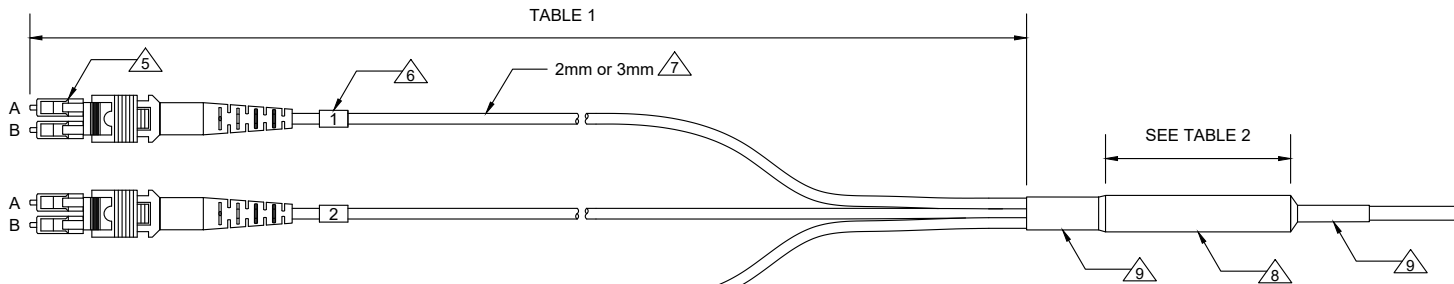

WITH STAGGERED CONNECTORS

DRAWN BY:	K. THOMAS	02/05/2016	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY:	A. JENSEN	06/21/2016		TITLE: C-BREAK-BK4	
DIMENSIONS: METRIC [IMPERIAL]			SIZE A	DWG. NO. C-BREAK-BK4	REV B.1
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE		SHEET 1 OF 1