



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
3. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
4. PULLING EYE ROPE LACING BEGINS APPROX. 3 FT BEFORE BREAKOUT.
5. DIAMETER OF COLEFLEX BEST FIT TO CABLE.
6. NYLON ROPE 1/8" DIAMETER. 20lb LOAD RATING. SAFETY RATING 12:1.
7. TAPE TO SECURE PULLING EYE ROPE.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	2577 2578	INITIAL RELEASE	K.T.	03/14/2016	A.J.

REMOVAL INSTRUCTIONS:
 REMOVE THE TAPE FROM THE CABLE END.
 REMOVE THE TAPE FROM THE PULLING EYE END.
 GENTLY REMOVE THE COLEFLEX.
 REMOVE THE TAPE SECURING THE NYLON ROPE TO THE CABLE
 UNLACE NYLON ROPE FROM CABLE.
 DISCARD THE PULLING EYE.

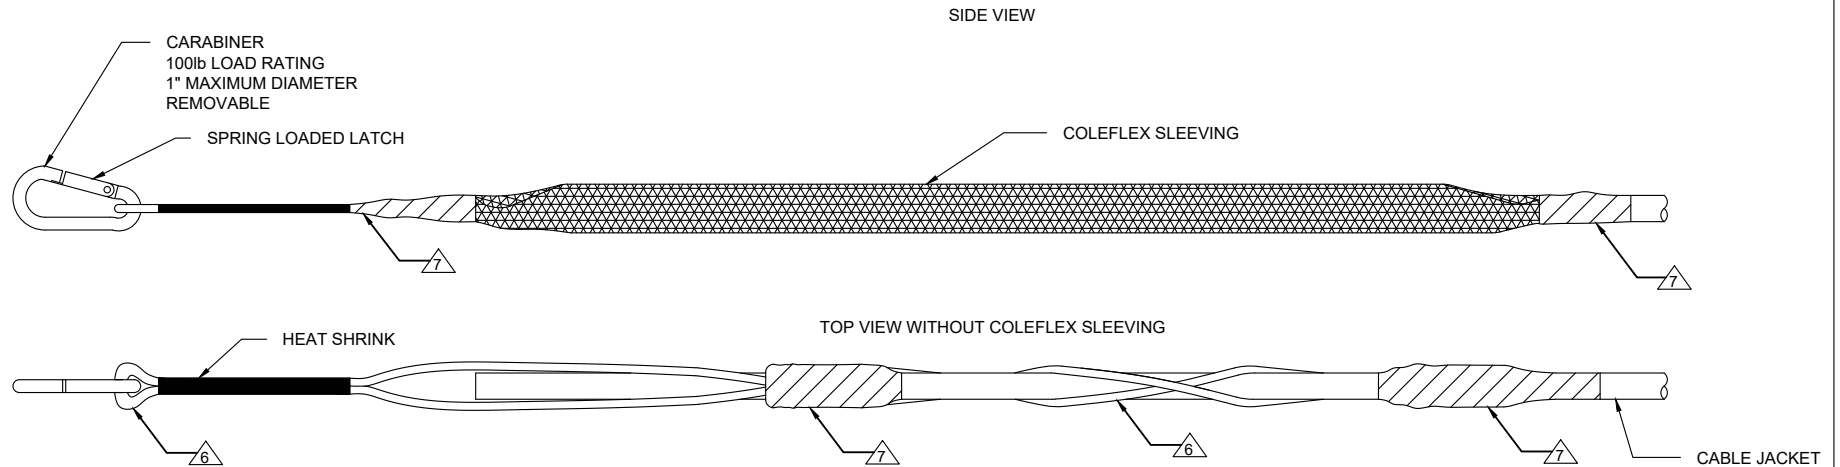

DRAWN BY:	K. THOMAS	03/07/2016	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY:	A. JENSEN	03/14/2016		TITLE: C PULLING EYE UNTERMINATED	
DIMENSIONS: METRIC [IMPERIAL]			SIZE A	DWG. NO. C-PULLING-EYE-UNTERM	REV A
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SCALE: NOT TO SCALE		SHEET 1 OF 1