



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	01/30/2017	A.J.

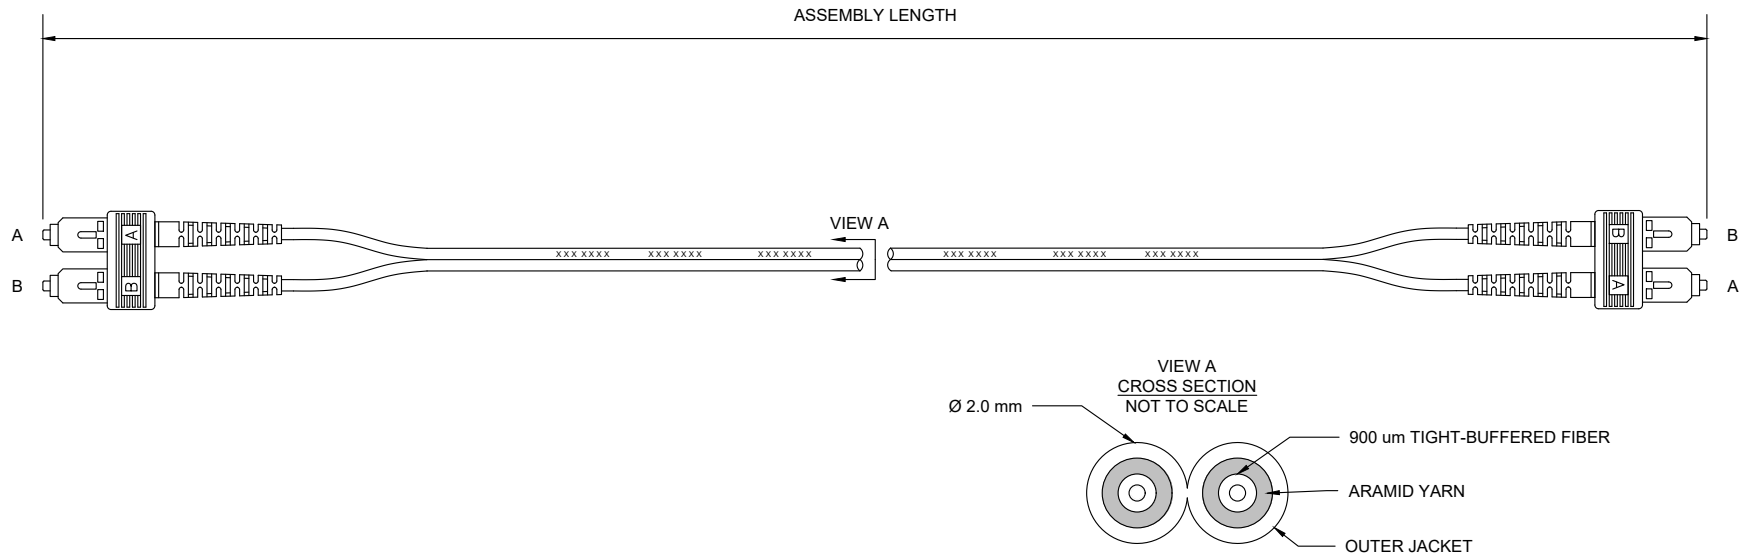

DESCRIPTION: SC-CLIP UPC / SC-CLIP UPC x 2-FIBER SM 2.0 mm ZIP OFNR CABLE			
DRAWN BY:	K. THOMAS	01/30/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	01/30/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: SC-CLIP/SC-CLIP SM 2.0 mm ZIP OFNR	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. SUSZ02SCSCXXXPX
		SCALE: NOT TO SCALE	REV A
		SHEET 1 OF 1	

BILL OF MATERIALS			TEST LIMITS AT 1310 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	SINGLEMODE OS2 ZIP OFNR 2.0 mm CABLE, YELLOW: PERFORMA				
1	4	SC-CLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA	<=0.50dB	0.20dB	50dB	60dB