
NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. INDIVIDUALLY BAGGED.

1 BLUE

7. LLU: LENGTH AND UNIT OF MEASURE.

REV	ECR	ECR DESCRIPTION		DATE	CHECKED	
А	-	INITIAL RELEASE	K.T.	06/14/2017	A.J.	

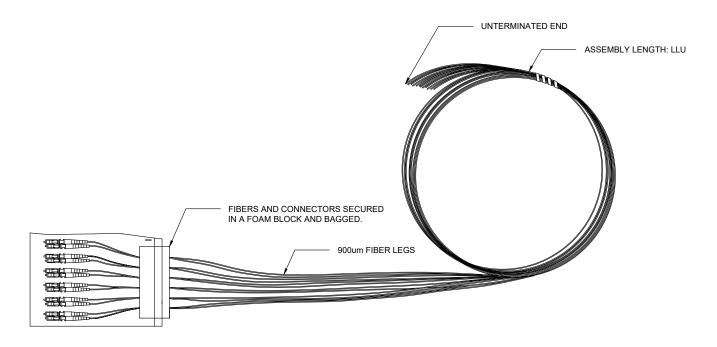

2	ORANGE														
3	GREEN														
4	BROWN							DESCRIPTION: LC-UNCLIPPED PC x12-FIBER PIGTAIL SET, OM3 TIGHT BUFFERED DIST CABLE, 900 um,							
5	GREY				LC PC POLISH CORNING CONNECTOR			PERFORMA, INDIVIDUAL BAG							
6	WHITE			FIBER TYPE	<u>:</u>	MULTI	MODE	DRAWN BY:	K. THOMAS	06/14/2017			C ENTERPRISES 2445 CADES WAY		
7	RED			CONNECTIO	ON DURABILITY:	500 MATINGS		APVD A JENOEN 00/44/00		00/44/0047			VISTA CA 92081		
8	BLACK	BILL OF MATERIALS		OPERATING -40°C to +75°C		to +75°C	BY:	A. JENSEN	06/14/2017		ENTERPRISES necting Today's Infrastructures	760-599-5111			
9	YELLOW	ITEM QUANTITY COMPONENT			TEST LIMITS AT 1300 nm			DIMENSIONS: METRIC [IMPERIAL] TITLE: OM3 12 FIBER LC PIGTAIL PERF					RF		
10	PURPLE	2	AR	FIBER OM3 TB DIST CABLE: PERFORMA	MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL			SIZE			REV A
11	ROSE		LC-NO CLIP PC POLISH; GRAY I.L. I.L. R.L. THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO			A	A JPBP12LBXXXXXPI								
12	AQUA	1	12	HOUSING, BLACK BOOT: PERFORMA	≤0.75dB	0.20dB	N/A	N/A	USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SCALE: NOT TO SCALE		SHEET 1	SHEET 1 OF 1	