
NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. INDIVIDUALLY BAGGED.

1 BLUE

7. LLU: LENGTH AND UNIT OF MEASURE.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED	
А	-	INITIAL RELEASE	K.T.	06/14/2017	A.J.	

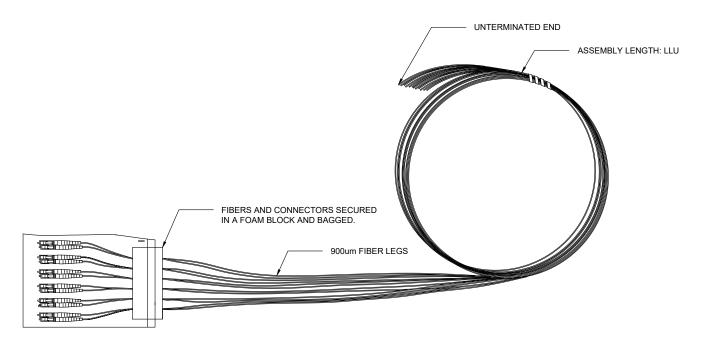

2	ORANGE														
3	GREEN														
4	BROWN				10.70.701/01/02/01/07			DESCRIPTION: LC-UNCLIPPED PC x12-FIBER PIGTAIL SET, OM3 TIGHT BUFFERED DIST CABLE, 900 um,							
5	GREY				LC PC POLISH CORNING CONNECTOR			CORNING, INDIVIDUAL BAG							
6	WHITE				FIBER TYPE	:	MULTII	MULTIMODE		K. THOMAS	06/14/2017			C ENTERPRISES	
7	RED	-			CONNECTIO	ON DURABILITY:	: 500 MATINGS		BY: APVD			1		2445 CADES VISTA CA 920	I
8	BLACK	BILL OF MATERIALS		OPERATING -40°C to +75°C		BY:	A. JENSEN	06/14/2017		ENTERPRISES necting Today's Infrastructures	760-599-5111				
	VELLOW/	BILL OF WATERIALS			ENVIRONIVI	ZINI.			DIMENSIONS: METRIC [IMPERIAL]			TITLE:	OM3 12 FIBER LC	PIGTAIL COR	RNING
9	YELLOW	ITEM	QUANTITY	COMPONENT	TEST LIMITS AT 1300 nm								T IOTAIL OOI		
10	PURPLE	2	AR	FIBER OM3 TB DIST CABLE:	MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SIZE			REV
11	ROSE		- 711	CORNING	I.L.	I.L.	R.L.	R.L.				A	JPBP12LBXXXXXUI		A
12	AQUA	1	12	LC-NO CLIP PC POLISH; GRAY HOUSING, BLACK BOOT: CORNING	≤0.75dB	0.20dB	N/A	N/A					SCALE: NOT TO SCALE	SHEET 1	SHEET 1 OF 1