
NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. INDIVIDUALLY BAGGED.

1 BLUE

7. LLU: LENGTH AND UNIT OF MEASURE.

REV	ECR DESCRIPTION		BY	DATE	CHECKED	
Α	-	INITIAL RELEASE	K.T.	06/14/2017	A.J.	

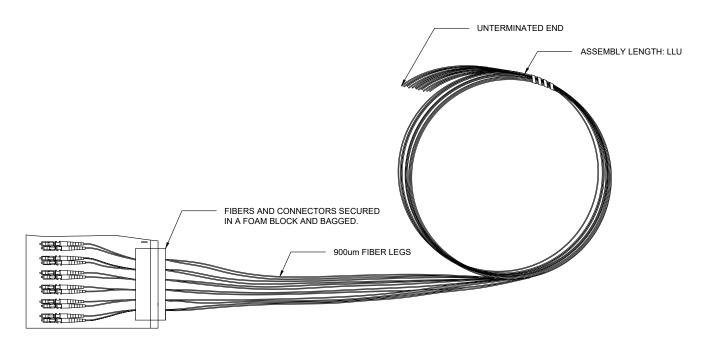

2	ORANGE														
3	GREEN														
4	BROWN				10.70.70.101.007.1110.00117.77			DESCRIPTION: LC-UNCLIPPED PC x12-FIBER PIGTAIL SET, OM4 TIGHT BUFFERED DIST CABLE, 900 um,							
5	GREY				LC PC POLISH CORNING CONNECTOR			PERFORMA, INDIVIDUAL BAG							
6	WHITE				FIBER TYPE	:	MULTIMODE		DRAWN K. THOMAS 06/14/2017				C ENTERPRISES		
	RED			CONNECTION DURABILITY: 500 MATINGS		ATINGS	DT.		-			2445 CADES WAY			
	KED						APVD	A. JENSEN	06/14/2017		ENTERPRISES	VISTA CA 920 760-599-5111	181		
8	BLACK	BILL OF MATERIALS		OPERATING ENVIRONMENT:		-40°C to +75°C		BY:				necting Today's Infrastructures	700-599-5111		
9	YELLOW	ITEM QUANTITY COMPONENT			TEST LIMITS AT 1300 nm			DIMENSIONS: METRIC [IMPERIAL] TITLE: OM4 12 FIBER LC PIGTAIL PERF						RF	
10	PURPLE	0	AR	FIBER OM4 TB DIST CABLE:	MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY			SIZE	DWG. NO.		REV
11	ROSE		AR	PERFORMA	I.L.	I.L.	R.L.	R.L.				Α	A HPBP12LBXXXXXPI		A
''	NOSE	LC-NO CLIP PC POLISH; GRAY 1 12 HOUSING, BLACK BOOT: 40.754B 0.004B N/A			INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT										
12	AQUA	1	1 12	HOUSING, BLACK BOOT: PERFORMA	≤0.75dB 0.20dB N/A N/A		N/A	WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SCALE: NOT TO SCALE		SHEET 1	SHEET 1 OF 1		