


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. INDIVIDUALLY BAGGED.
7. LLU: LENGTH AND UNIT OF MEASURE.


| REV | ECR | DESCRIPTION | BY | DATE | CHECKED |
|-----|-----|-----------------|------|------------|---------|
| A | - | INITIAL RELEASE | K.T. | 06/14/2017 | A.J. |

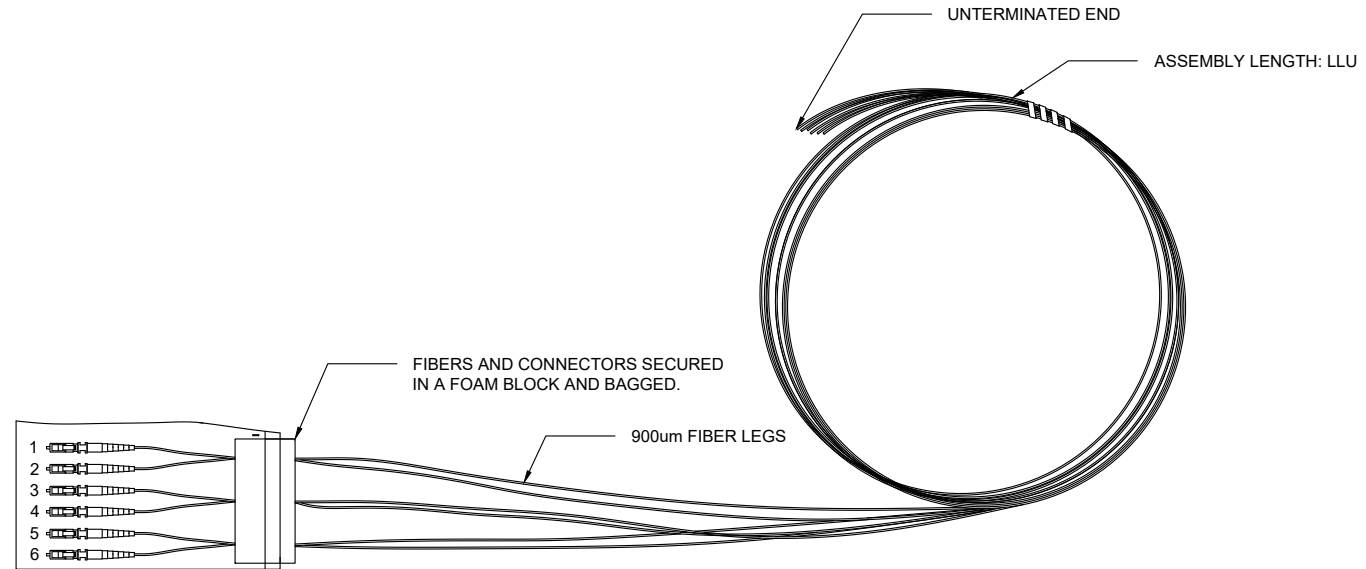

| FIBER LEG COLOR | |
|-----------------|--------|
| 1 | BLUE |
| 2 | ORANGE |
| 3 | GREEN |
| 4 | BROWN |
| 5 | GREY |
| 6 | WHITE |

| BILL OF MATERIALS | | | |
|-------------------|----------|--|--|
| ITEM | QUANTITY | COMPONENT | |
| 2 | AR | FIBER OM4 TB DIST CABLE: PERFORMA | |
| 1 | 6 | LC-NO CLIP PC POLISH; GRAY HOUSING, BLACK BOOT: PERFORMA | |

| LC PC POLISH CORNING CONNECTOR | | | |
|--------------------------------|-----------|----------------|-----------|
| FIBER TYPE: | | MULTIMODE | |
| CONNECTION DURABILITY: | | 500 MATINGS | |
| OPERATING ENVIRONMENT: | | -40°C to +75°C | |
| TEST LIMITS AT 1300 nm | | | |
| MAX. I.L. | TYP. I.L. | MIN. R.L. | TYP. R.L. |
| ≤0.75dB | 0.20dB | N/A | N/A |

| | | | |
|--|-----------|------------|--|
| DESCRIPTION: LC-UNCLIPPED PC x06-FIBER PIGTAIL SET, OM4 TIGHT BUFFERED DIST CABLE, 900 um, PERFORMA, INDIVIDUAL BAG | | | |
| DRAWN BY: | K. THOMAS | 06/14/2017 |  C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111 |
| APVD BY: | A. JENSEN | 06/14/2017 | |
| DIMENSIONS: METRIC [IMPERIAL] | | | TITLE: OM4 6 FIBER LC PIGTAIL PERF |
| PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED. | | | SIZE: A DWG. NO.: HPBP06LBXXXXXPI SCALE: NOT TO SCALE |
| | | | REV: A SHEET 1 OF 1 |