
## NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. INDIVIDUALLY BAGGED.

1 BLUE

7. LLU: LENGTH AND UNIT OF MEASURE.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
Α	-	INITIAL RELEASE	K.T.	06/14/2017	A.J.

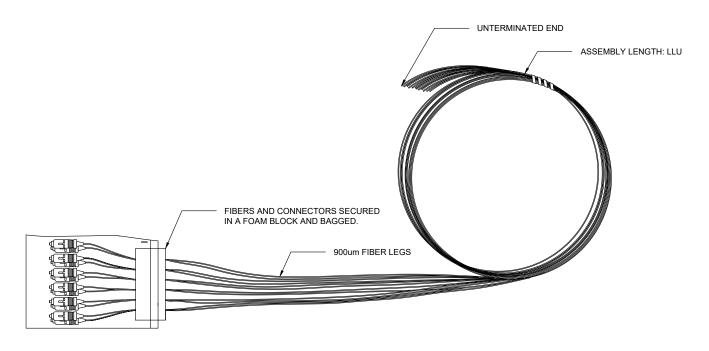

2	ORANGE														
3	GREEN														
4	BROWN							DESCRIPTION: SC-UNCLIPPED PC x12-FIBER PIGTAIL SET, OM3 TIGHT BUFFERED DIST CABLE, 900 um,							
5	GREY				SC PC POLISH CORNING CONNECTOR			PERFORMA, INDIVIDUAL BAG							
6	WHITE				FIBER TYPE	i:	MULTI	MODE	DRAWN BY:	K. THOMAS	06/14/2017			C ENTERPRIS	I
7	RED			CONNECTIO	ONNECTION DURABILITY: 500 MATINGS		APVD A JENOEN				VISTA CA 92		81		
8	BLACK	BILL OF MATERIALS		OPERATING -40°C to +75°C		to +75°C	BY:	A. JENSEN	06/14/2017		ENTERPRISES necting Today's Infrastructures	760-599-5111			
9	YELLOW	ITEM QUANTITY COMPONENT TEST LIMITS AT 1300 nm				DIMENSIONS: METRIC [IMPERIAL]  TITLE: OM3 12 FIBER SC PIGTAIL PERF						₹F			
10	PURPLE	2	AR	FIBER OM3 TB DIST CABLE: PERFORMA	MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL		SIZE			REV	
11	ROSE			SC-NO CLIP PC POLISH; GRAY	I.L.	I.L.	R.L. R.L	R.L.	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE			A JPBP12SBXXXXXPI			A
12	AQUA	1	12	HOUSING, BLACK BOOT: PERFORMA	≤0.75dB	0.20dB	N/A	N/A	USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SCALE: NOT TO SCALE		SHEET 1	SHEET 1 OF 1	