



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. REFER TO SALES FOR COMPLETE MDU ASSEMBLY LINEUP.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	06/07/2017	A.J.

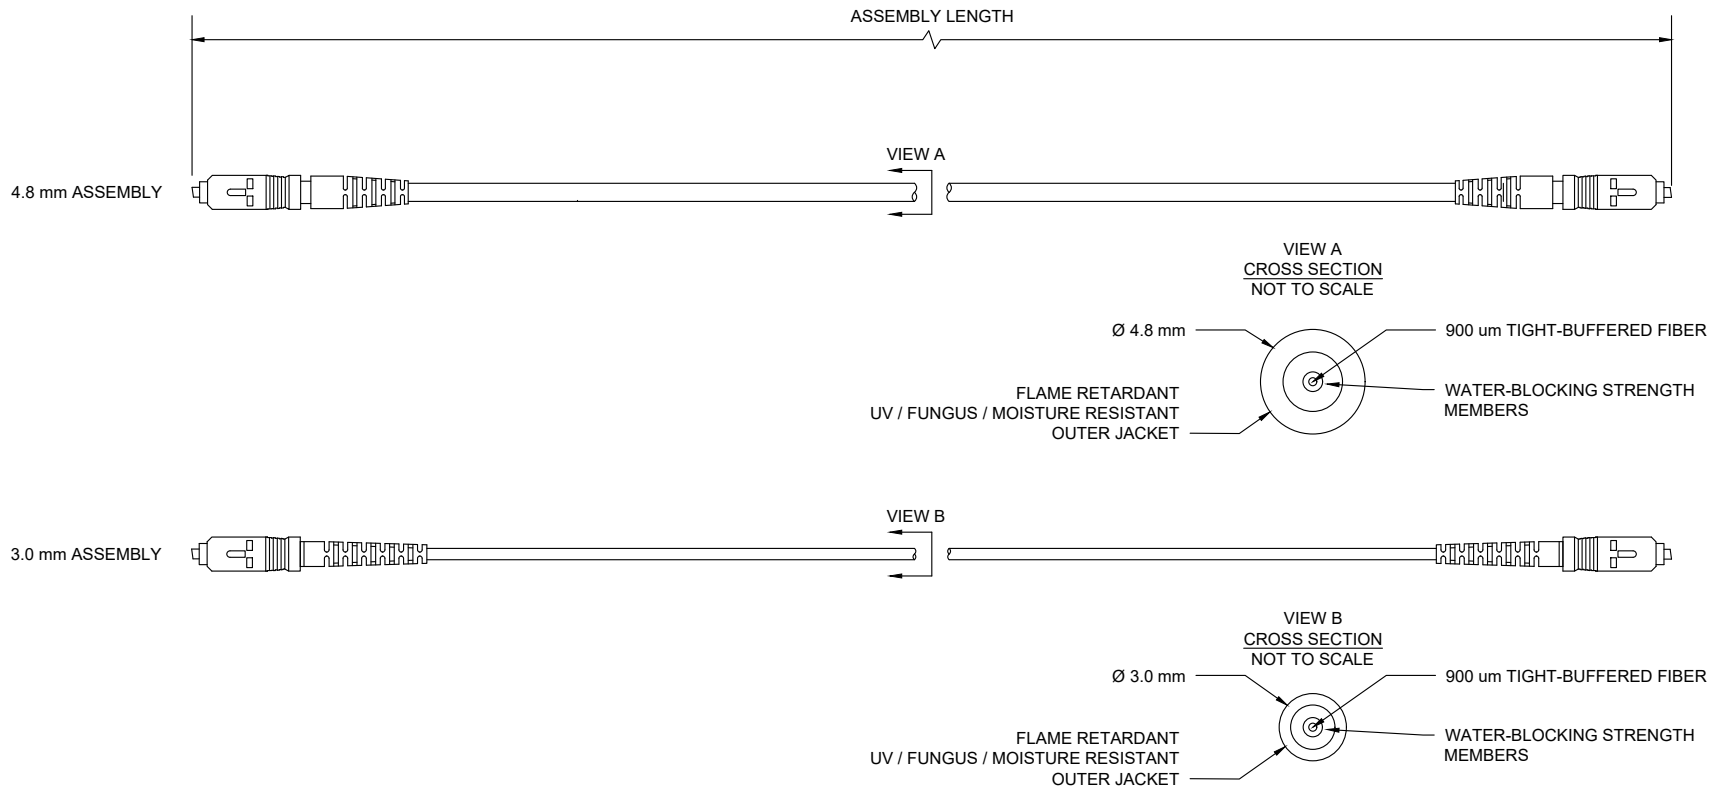

SINGLE-MODE OS2 OFNR IN/OUT CABLE		SC APC CONNECTOR				DESCRIPTION: SC APC POLISH / SC APC POLISH, 1 FIBER SINGLE-MODE OS2 IN/OUT OFNR CABLE			
		COMPLIANT:	TELCORDIA GR-326						
COMPLIANT:	VERIZON TPR 9424 ISSUE 2	TIA 604				DRAWN BY:	K. THOMAS	06/06/2017	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
	SMF-28 BEND INSENSITIVE FIBER	OPERATING ENVIRONMENT: -40°C TO +85°C				APVD BY:	A. JENSEN	06/07/2017	
	EIA/TIA 568	CONNECTOR DURABILITY: 500 MATINGS				DIMENSIONS: METRIC [IMPERIAL]		TITLE: INDOOR/OUTDOOR MDU DROP ASSM.	
	ETL LISTED OFNR	APC TEST LIMITS AT 1310 nm				PROPRIETARY AND CONFIDENTIAL		SIZE: A	
	TELCORDIA GR-409-CORE	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		DWG. NO. MDU-ASSEMBLIES	
	TELCORDIA GR-20 WATER PENETRATION	≤0.50dB	0.20dB	≥65dB	68dB	SCALE: NOT TO SCALE		REV: A	
ICEA-S-104-696	OPERATING ENVIRONMENT: -40°C TO +75°C		APPLICATION: MDU		SHEET 1 OF 1				