



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. METHOD B POLARITY DEPICTED.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP.
8. HEAT SHRINK FOR STRAIN RELIEF.
9. HEAT SHRINK.
10. C-BREAK. OVERALL DIAMETER: 16 mm MAX.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	08/24/2017	A.J.

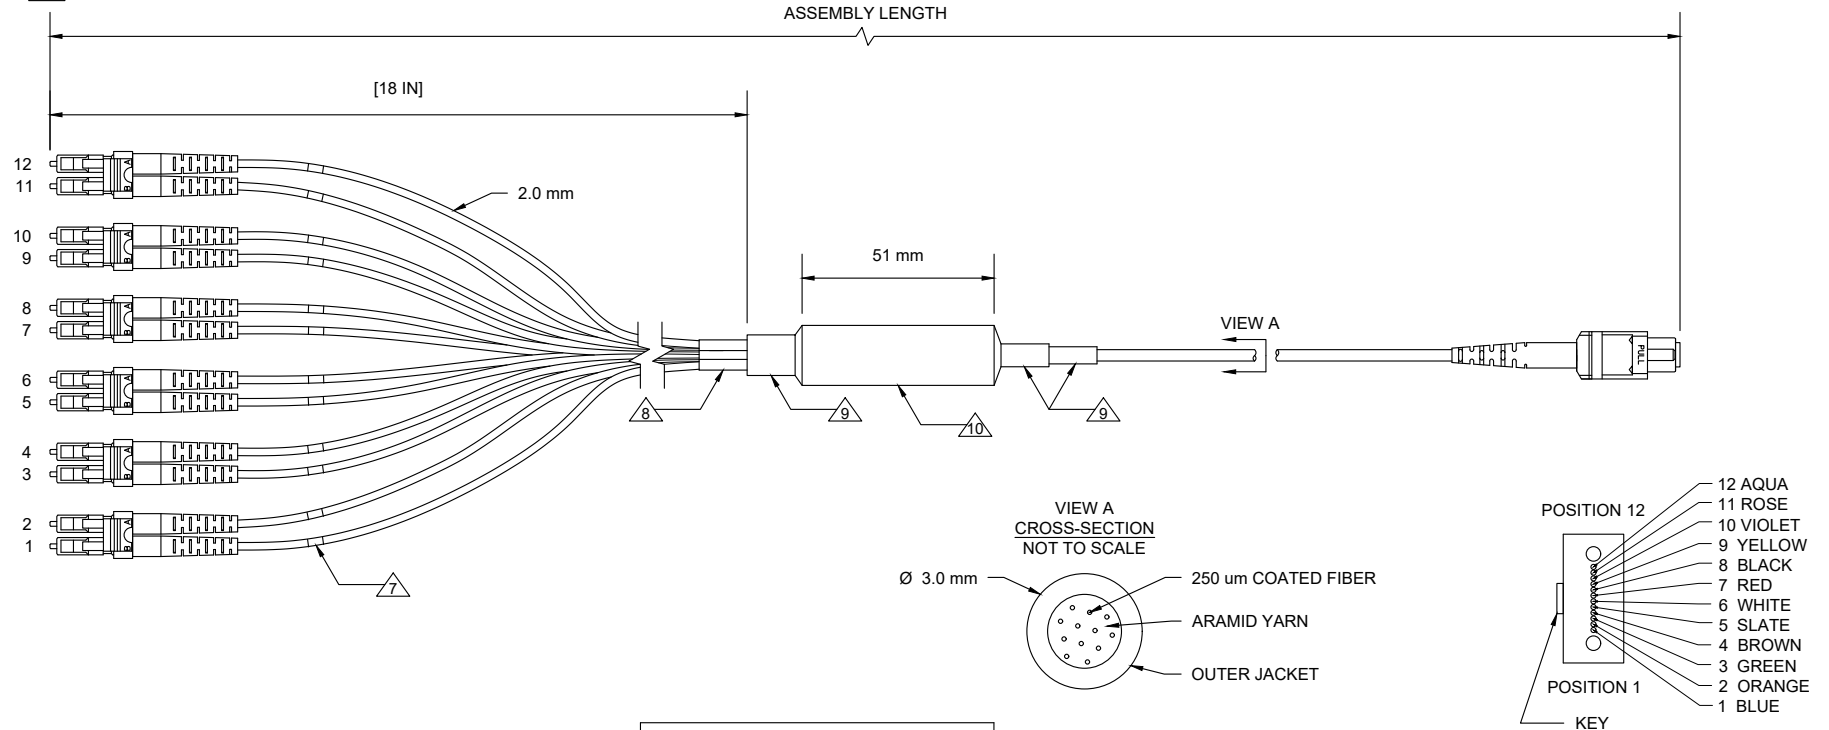

BILL OF MATERIALS			UPC TEST LIMITS AT 1310 nm				DESCRIPTION: MTP-12 FEMALE APC POLISH/LC-CLIPPED UPC POLISH x 12-FIBER OS2 OFNP MIC 250 um w/ CP&G FIBER, 18in SINGLE LEG BREAKOUT, TEST REPORT, METHOD B POLARITY			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.	DRAWN BY:	K. THOMAS	08/24/2017	
6	1	SINGLE-MODE UPC TEST REPORT					APVD BY:	A. JENSEN	08/24/2017	
5	1	SINGLE-MODE APC MTP TEST REPORT	≤0.50dB	0.20dB	≥50dB	60dB	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111			
4	1	C-BREAK 2: 18in SINGLE LEG BREAKOUT, 2.0 mm LEGS, YELLOW	MTP APC TEST LIMITS AT 1310 nm							DIMENSIONS: METRIC [IMPERIAL]
3	AR	SINGLE-MODE OS2 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; YELLOW: PERFORMA, CORNING GLASS AND PRINT					MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	12	LC-CLIPPED UPC POLISH, BLUE HOUSING, BLUE BOOT: PERFORMA					PROPRIETARY AND CONFIDENTIAL			
1	1	MTP-12 FEMALE SINGLE-MODE APC POLISH; GREEN HOUSING, BLACK BOOT: CORNING	≤0.50dB	N/A	≥60dB	N/A	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			
							SIZE	DWG. NO.		REV
							A	SBPG12MTLCFRXRJ		A
							SCALE: NOT TO SCALE			SHEET 1 OF 1