


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. STAGGERED END WITH PULLING EYE
 - 6.1. CONNECTORS STAGGERED IN PAIRS BY 1 INCH INCREMENTS.
 - 6.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
 - 6.3. PAIRS 1-2 LONGEST: 25 INCHES. PAIRS 5-6 SHORTEST: 23 INCHES.

- 7 FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP.
- 8 HEAT SHRINK FOR STRAIN RELIEF.
- 9 C-BREAK. OVERALL DIAMETER: 14 mm MAX.
- 10 ADHESIVE LINED HEAT SHRINK.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	09/22/2017	D.B.

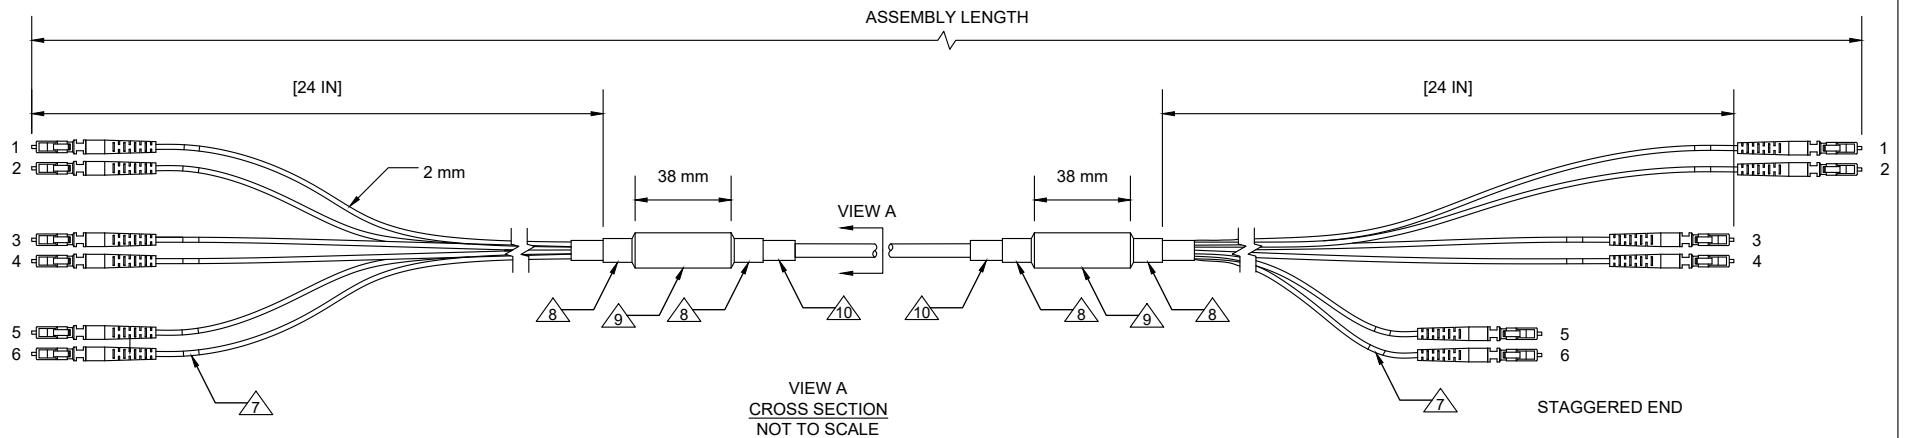

VIEW A
CROSS SECTION
NOT TO SCALE

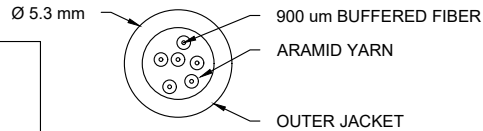

EXAMPLE OF PULLING EYE



BILL OF MATERIALS

ITEM	QTY	COMPONENT
5	1	MULTIMODE PC TEST REPORT
4	1	PULLING EYE: 6 FIBERS
3	2	C-BREAK 2: SINGLE LEG BREAKOUT, 2 mm FURCATION; ORANGE
2	AR	MULTIMODE OM1 6 FIBER OFNR TIGHT-BUFFER INDOOR/OUTDOOR CABLE; ORANGE: PERFORMA
1	12	LC-UNCLIPPED PC POLISH CONNECTOR; BEIGE HOUSING, WHITE BOOT: PERFORMA

MULTIMODE TEST LIMITS
AT 1300 nm

MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION: LC-UNCLIPPED PC / LC-UNCLIPPED PC x 6-FIBER OM1 OFNR INDOOR/OUTDOOR CABLE, SINGLE LEG BREAKOUTS, TEST REPORT, PULLING EYE W/ STAGGERED END

DRAWN BY:	K. THOMAS	09/22/2017
APVD BY:	D. BROWN	09/22/2017



C-ENTERPRISES
Connecting Today's Infrastructures

C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

TITLE: LC/LC IN/OUT OM1 6 FIBER ASM

PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

SIZE	DWG. NO.	REV
A	MPRO06LBLBFRPPX	A
SCALE: NOT TO SCALE		SHEET 1 OF 1