
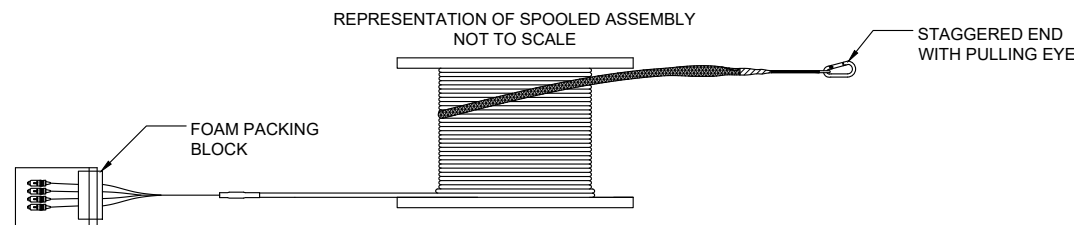


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. STAGGERED END WITH PULLING EYE.
  - 6.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
  - 6.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
  - 6.3. PAIRS 1-2 LONGEST: 25". PAIRS 3-4 SHORTEST: 24".

- 7 HEAT SHRINK FOR STRAIN RELIEF.  
 8 FIBERS 5,6 TRIMMED AT BREAKOUT POINT.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	09/18/2017	D.B.

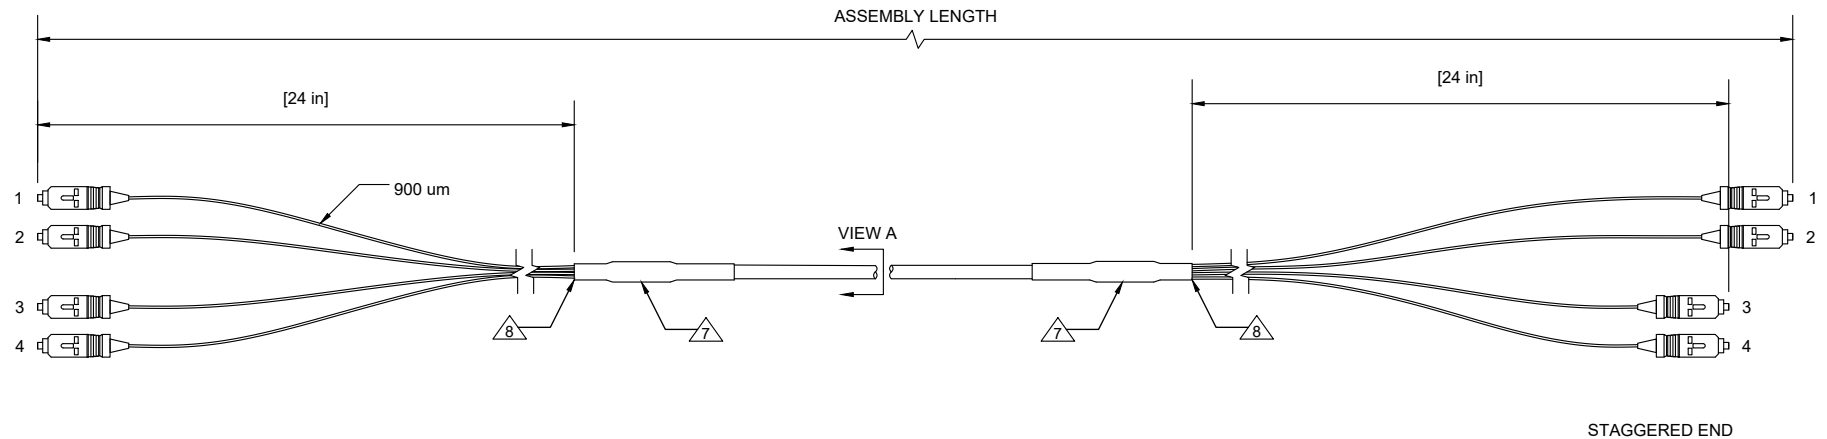

FIBERS AND CONNECTORS SECURED IN A FOAM BLOCK AND BAGGED.

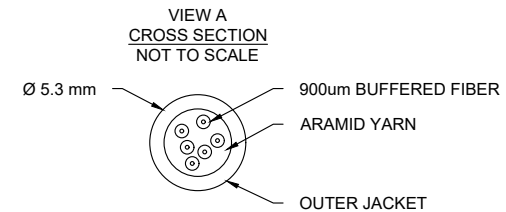

DESCRIPTION: SC-NOCLIP/SC-NOCLIP PC POLISH, MULTIMODE OM4 x4 FIBER TERMINATED, 6 FIBER OFNR IN/OUT CABLE, 900 um BREAKOUT, PULLING EYE: STAGGERED CONNECTORS

DRAWN BY: K. THOMAS 09/18/2017  
 APVD BY: D. BROWN 09/18/2017



C ENTERPRISES  
 2445 CADES WAY  
 VISTA CA 92081  
 760-599-5111

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	PULLING EYE: STAGGERED CONNECTORS, 900 um TIGHT-BUFFERED FIBERS
2	AR	MULTIMODE OM4 6-FIBER TIGHT-BUFFERED INDOOR/OUTDOOR OFNR CABLE; BLACK: PERFORMA, CORNING GLASS AND PRINT
1	8	SC-NOCLIP PC POLISH, BEIGE HOUSING, BLACK BOOT: PERFORMA

PC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]  
 PROPRIETARY AND CONFIDENTIAL  
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE: SC/SC OM4 x4 FIBER IN/OUT OFNR 900 um	
SIZE A	DWG. NO. HPRO04SBSB9XPPX
SCALE: NOT TO SCALE	
SHEET 1 OF 1	