


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. STAGGERED END WITH PULLING EYE
  - 6.1. CONNECTORS STAGGERED IN PAIRS BY 1 INCH INCREMENTS.
  - 6.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
  - 6.3. PAIRS 1-2 LONGEST: 25 INCHES. PAIRS 5-6 SHORTEST: 23 INCHES.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	12/28/2017	A. J

- 7 FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR TIP. 12 PLACES.
- 8 HEAT SHRINK FOR STRAIN RELIEF. 2 PLACES.
- 9 C-BREAK. OVERALL DIAMETER: 14 mm . 2 PLACES.
- 10 HEAT SHRINK. 6 PLACES.

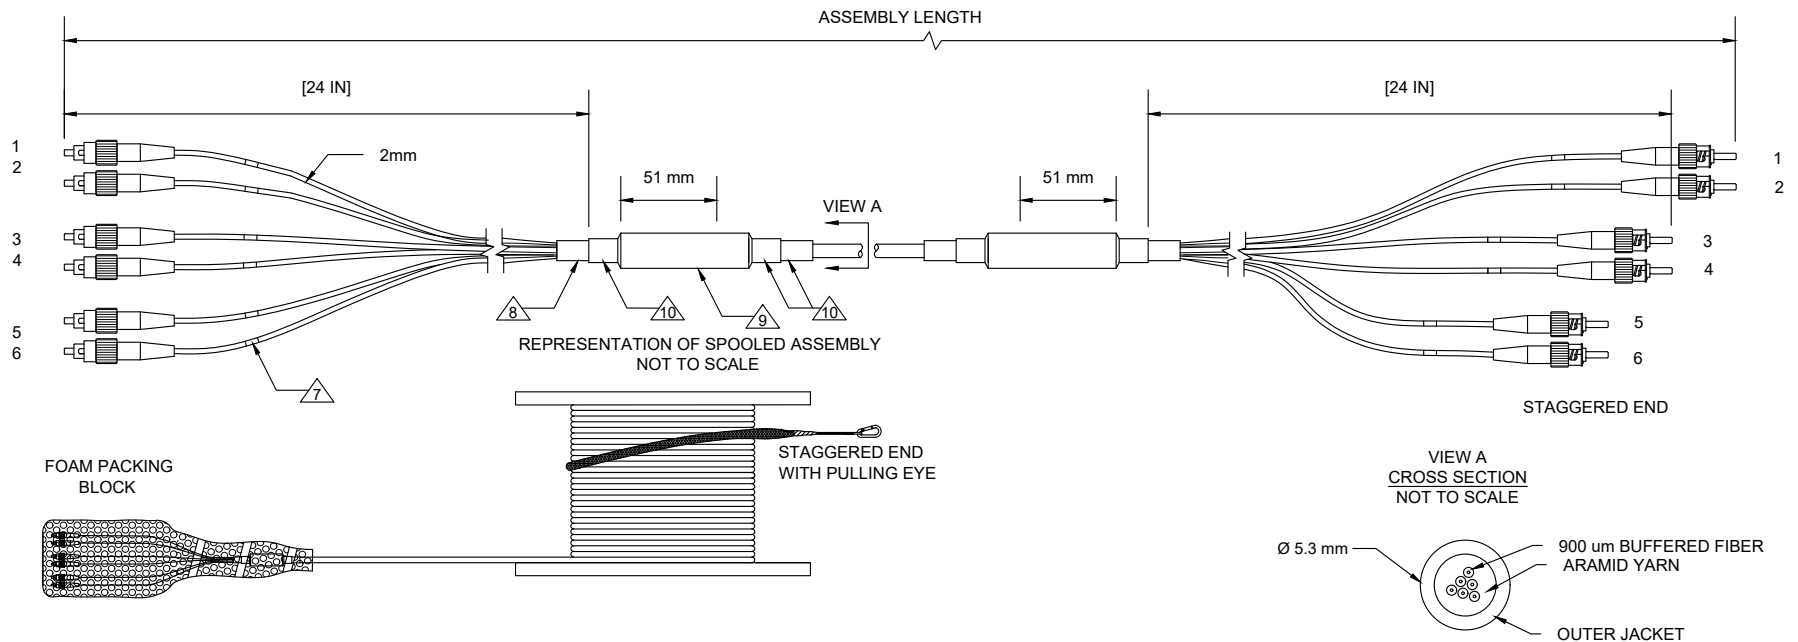

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
6	1	SPOOL
5	1	PULLING EYE: 6 FIBERS
4	2	C-BREAK 2: SINGLE LEG BREAKOUT, 2 mm FURCATION; YELLOW
3	AR	SINGLEMODE OS2 6 FIBER OFNR INDOOR/OUTDOOR CABLE; BLACK: CORNING
2	6	ST UPC POLISH ; METAL HOUSING, BLUE BOOT: PERFORMA
1	6	FC UPC POLISH ; METAL HOUSING, BLUE BOOT: PERFORMA

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION: FC UPC / ST UPC x 6-FIBER OS2 SINGLE-MODE OFNR IN/OUT CABLE, SINGLE LEG BREAKOUT 2 mm, PULLING EYE W/ STAGGERED END, SPOOLED.			
DRAWN BY:	M. KHANFIR	12/28/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	12/28/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: FC / ST OS2 OFNR IN/OUT CABLE	
PROPRIETARY AND CONFIDENTIAL		SIZE: A	REV: A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		DWG. NO.: SURO06FCSTFXPSS	
		SCALE: NOT TO SCALE	SHEET 1 OF 1