




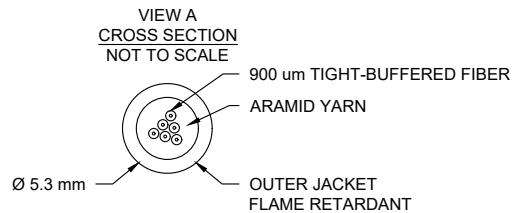


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. STAGGERED END WITH PULLING EYE
 - 7.1. CONNECTOR PAIRS STAGGERED BY 1 INCH INCREMENTS.
 - 7.2. PAIRS STAGGER ALTERNATE BY INCREASING AND DECREASING FROM DEFINED BREAKOUT LENGTH.
 - 7.3. PAIRS 1-2 LONGEST: 25". PAIRS 3-4 SHORTEST: 24".


-  FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR.
-  HEAT SHRINK FOR STRAIN RELIEF.
-  HEAT SHRINK.
-  C-BREAK. OVERALL DIAMETER: 10 mm.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	05/24/2016	A.J.
B	-	C-BREAK UPDATE	K.T.	12/18/2017	M.K.

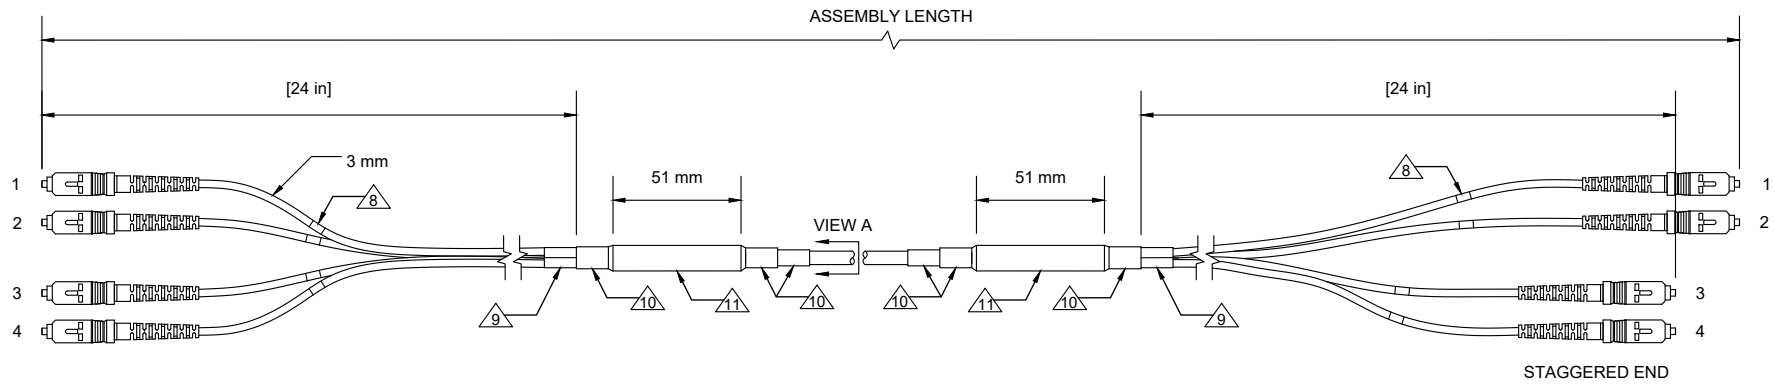

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
5	1	MULTIMODE TEST REPORT
4	1	PULLING EYE: STAGGERED CONNECTORS
3	2	C-BREAK 2: SINGLE LEG BREAKOUT: 3 mm FURCATION, ORANGE
2	AR	MULTIMODE OM1 6-FIBER TIGHT-BUFFERED INDOOR/OUTDOOR OFNR CABLE; BLACK: PERFORMA
1	8	SC-NOCLIP PC POLISH, BEIGE HOUSING, BLACK BOOT: PERFORMA

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION:		SC-NOCLIP/SC-NOCLIP PC POLISH, MULTIMODE OM1 x4 FIBER TERMINATED, 6 FIBER OFNR IN/OUT CABLE, SINGLE LEG BREAKOUT: 3 mm FURCATION, PULLING EYE: STAGGERED CONNECTORS			
DRAWN BY:	K. THOMAS	12/18/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
APVD BY:	A. JENSEN	12/18/2017			
DIMENSIONS: METRIC [IMPERIAL]			TITLE: MPRO04SBSBERPPX		
PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	MPRO04SBSBERPPX	B
SCALE: NOT TO SCALE				SHEET 1 OF 1	