
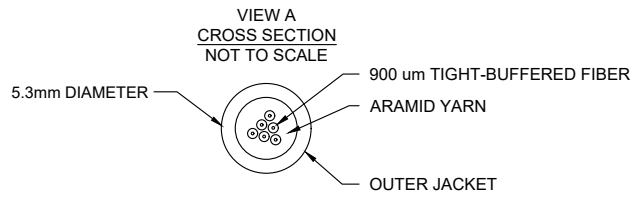


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. FIBER LEG LABEL. PLACED APPROX. 6 INCHES FROM CONNECTOR. 4 PLACES.
7. HEAT SHRINK FOR STRAIN RELIEF. 2PLACES.
8. HEAT SHRINK. 6 PLACES.
9. C BREAK. OVERALL DIAMETER: 10 mm. 2 PLACES.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K	12/18/2017	A.J.

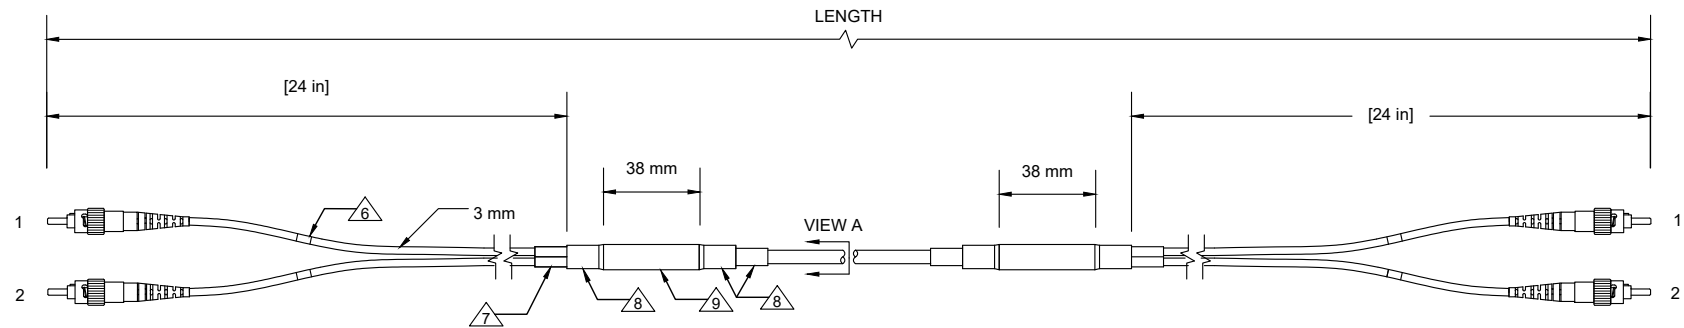

DESCRIPTION: ST/ ST UPC POLISH, SINGLEMODE OS2 x2 FIBER TERMINATED, 6 FIBER OFNR IN/OUT CABLE, SINGLE LEG BREAKOUT; 3mm FURCATION.

BILL OF MATERIALS

ITEM	QTY	COMPONENT
3	2	SINGLE LEG BREAKOUT 2 FIBER; FURCATION 3mm, YELLOW
2	AR	SINGLE-MODE OS2 IN/OUT OFNR CABLE, BLACK: CORNING
1	4	ST-UPC POLISH; METAL HOUSING, BLUE BOOT: CORNING

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DRAWN BY:	M. KHANFIR	12/18/2017
APVD BY:	A. JENSEN	12/19/2017



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]
PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

TITLE:ST/ST C-BREAK SINGLE 3mm, SM IN/OUT OFNR		SIZE	DWG. NO.	REV
		A	SURO02STSTEXXXUX	A
SCALE: NOT TO SCALE			SHEET 1 OF 1	