
## NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-B.3
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
- 6. INDIVIDUALLY BAGGED.

1 BLUE

7. LLU: LENGTH AND UNIT OF MEASURE.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED	
А	-	INITIAL RELEASE	M. K	01/26/2018	A.J.	

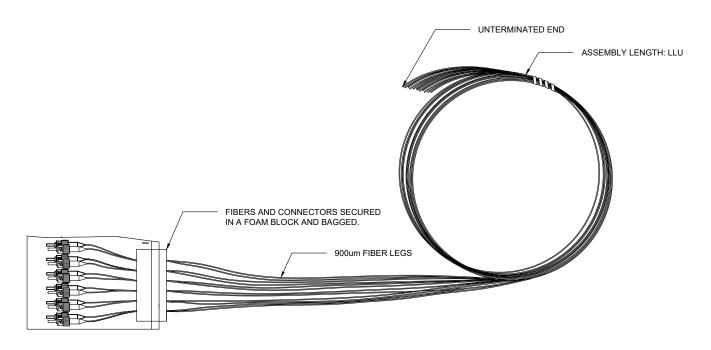

2	ORANGE															
3	GREEN															
4	BROWN				ST UPC POLISH PERFORMA CONNECTOR			ST UPC x12-FIBER PIGTAIL SET, SINGLE-MODE TIGHT BUFFERED MIC OFNR CABLE, DESCRIPTION:								
5	GREY				31 OF CT OLISITY ENT ON THE CONNECTOR			900 um, PERFORMA, INDIVIDUAL BAG.								
6	WHITE	1		FIBER TYPE	:	SINGLI	SINGLE MODE		DRAWN BY: M. KHANFIR 01/26/2018				C ENTERPRISES			
7	RED			CONNECTIO	CONNECTION DURABILITY: 500 MATINGS		APVD					2445 CADES VISTA CA 920				
8	BLACK	BILL OF MATERIALS			OPERATING ENVIRONMENT: -40°C to +85°C		BY:	A. JENSEN	01/26/2018		ENTERPRISES necting Today's Infrastructures	760-599-5111				
9	YELLOW	ITEM QUANTITY COMPONENT		TEST LIMITS AT 1310 nm		DIMENSIONS: METRIC [IMPERIAL]  TITLE: SM 12 FIBER ST PIGTAIL PERFOR						ORMA				
10	PURPLE	2	AR	FIBER SINGLE-MODE MIC	MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL		SIZE	- 1.5. 1.5.		REV		
11	ROSE		- "	OFNR CABLE: PERFORMA	I.L.	I.L.	R.L.	R.L.	THIS DOCUMENT CONTAINS PROPRIETARY			A	SUBP12STXXXXXPI		A	
12	AQUA	1	12	ST UPC POLISH; METAL HOUSING, BLUE BOOT: PERFORMA	≤0.50dB	0.20dB	≥50dB	60dB	<ul> <li>INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.</li> </ul>			SCALE: NOT TO SCALE		SHEET 1	SHEET 1 OF 1	