

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
- 2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
- 3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
- 4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
- 5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST

REV	ECR	ECR DESCRIPTION		DATE	CHECKED
Α	-	INITIAL RELEASE	M.K.	12/12/2017	A.J



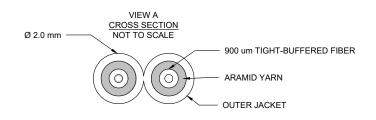

DESCRIPTION: FC UPC / LC-CLIP SHORT BOOT UPC, x 2-FIBER SM 0S2 2.0 mm ZIP OFNR CABLE

BILL OF MATERIALS]			DRAWN BY:	M. KHANFIR	12/12/2017		Œ	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111		
ITEM	TEM QTY COMPONENT		LIBO TEOT LIMITO		APVD BY:	A. JENSEN	12/13/2017	C.ENTERPRISES Connecting Today's Infrastructures					
3	2	SINGLE-MODE OS2 ZIP OFNR 2.0 mm CABLE, YELLOW: PERFORMA	UPC TEST LIMITS AT 1310 nm		DIMENSIONS: METRIC [IMPERIAL]			TITLE: FC/LC-CLIP SHORT BOOT SM 2.0 mm ZIP OFNR					
	LC-CLIPPED UPC POLISH; BLUE HOUSING, SHORT BLUE		MAX.	TYP.	MIN.	TYP.	PROPRIETARY AND CONFIDENTIAL			SIZE	DWG. NO.		REV
	2	BOOT: PERFORMA	I.L.	I.L.	R.L.	R.L.	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES, NOT TO BE		Α	SUSZ02FCLEXXXPX		A	
1	1 2 FC-UPC POLISH; METAL HOUSING, BLUE BOOT: PERFORMA		≤0.50dB	0.20dB	≥50dB	60dB	USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.				SCALE: NOT TO SCALE	SHEET 1 OF	