
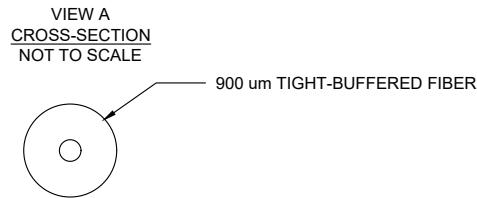


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. ASSEMBLY MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3.
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. TESTED TO CORNING REQUIREMENTS FOR INSERTION LOSS AND RETURN LOSS.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
7. CORNING CERTIFIED ASSEMBLY HOUSE. SIMPLEX PIGTAILS INCLUDED IN EXTENDED WARRANTY PROGRAM (EWP).
8. REFER TO SALES FOR FURTHER DETAILS.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	03/07/2018	A.J.

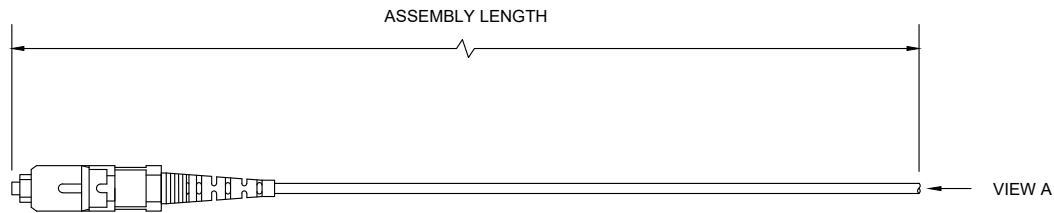






PERFORMANCE RANGE: ULTRA
ASSEMBLY OPTIONS
CONNECTORS: LC, SC, FC, ST.
CONNECTOR POLISH: UPC, APC, PC
FIBER MODE: SINGLE-MODE, OM1, OM2, OM3, OM4
CABLE JACKET RATING: OFNR.

SINGLE-MODE UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

SINGLE-MODE APC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥65dB	68dB

MULTIMODE TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

LC 	SC 
FC 	ST 

DESCRIPTION: 900 um FIBER SIMPLEX PIGTAILS, ULTRA.			
DRAWN BY:	M. KHANFIR	03/07/2018	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	03/07/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: CORNING GOLD PIGTAILS	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. CORNING_GOLD_PIGTAILS
		REV A	
		SCALE: NOT TO SCALE	
		SHEET 1 OF 1	