
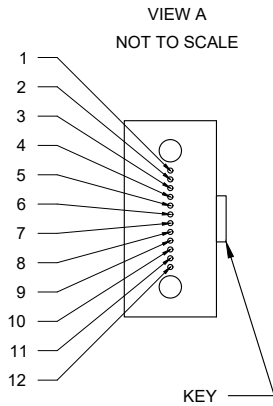



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. MTP-PRO CONNECTORS ARE POLARITY AND GENDER CHANGEABLE.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	10/17/2018	A.J.

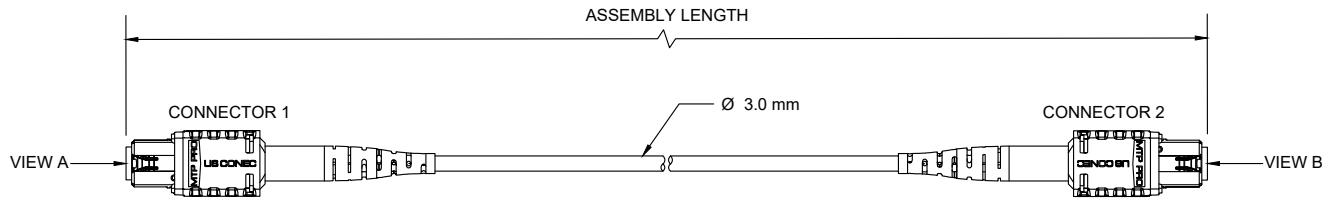

POLARITY TYPE B		
POSITION	FIBER COLOR	POSITION
CONNECTOR 1		CONNECTOR 2
1	BLUE	12
2	ORANGE	11
3	GREEN	10
4	BROWN	9
5	SLATE	8
6	WHITE	7
7	RED	6
8	BLACK	5
9	YELLOW	4
10	VIOLET	3
11	ROSE	2
12	AQUA	1

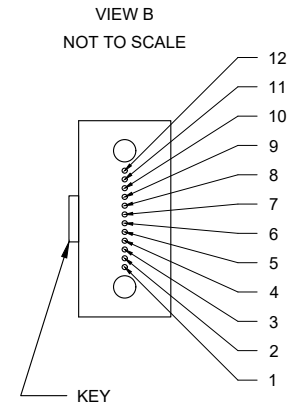

DESCRIPTION: MTP-PRO 12 FEMALE PC POLISH/MTP-PRO 12 FEMALE PC POLISH x 12-FIBER MULTIMODE OM3 OFNP MIC 250 um w/ CP&G FIBER, LOW LOSS TEST REPORT, POLARITY TYPE B

DRAWN BY: K. THOMAS 10/17/2018  
 APVD BY: A. JENSEN 10/17/2018



C ENTERPRISES  
 2445 CADES WAY  
 VISTA CA 92081  
 760-599-5111

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	MTP-PC LOW LOSS TEST REPORT
2	AR	MULTIMODE OM3 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
1	2	MTP® PRO-12 FEMALE MULTIMODE PC POLISH, ELITE LOW-LOSS FERRULE; AQUA HOUSING, BLACK BOOT: CORNING

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.35dB	20dB	N/A	N/A

DIMENSIONS: METRIC [IMPERIAL]		TITLE: MTP® PRO OM3 12-FIBER MIC 250 um LOW LOSS TEST	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. JPPG12MDMDXEXTX
		SCALE: NOT TO SCALE	REV A
		SHEET 1 OF 1	