
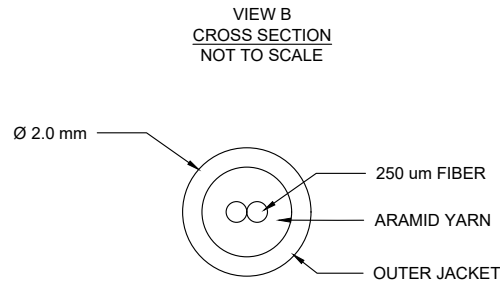


NOTES: UNLESS OTHERWISE SPECIFIED


1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	11/19/2018	A.J

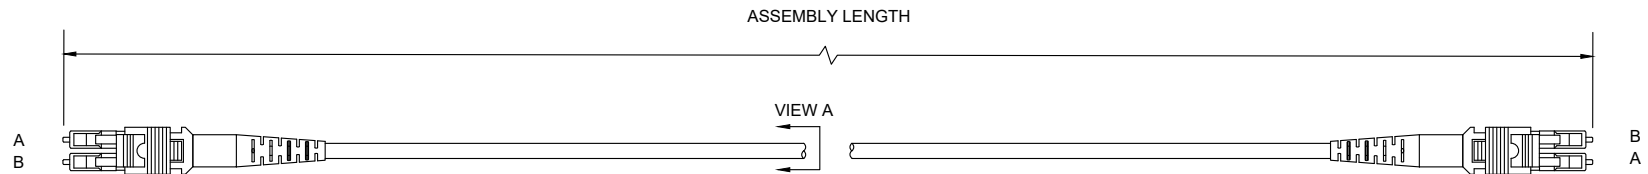

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
2	AR	MULTIMODE OM4 MIC 250 µm OFNP 2.0 mm CABLE, AQUA: CORNING GLASS AND PRINT, PERFORMA
1	2	LC-UNIBOOT PC POLISH, BLACK HOUSING, AQUA BOOT: PERFORMA

PC TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.75dB	0.20dB	N/A	N/A

DESCRIPTION: LC-UNIBOOT PC / LC-UNIBOOT PC x 2-FIBER OM4 MIC 250 µm OFNP 2.0 mm ROUND CABLE			
DRAWN BY:	M. KHANFIR	11/19/2018	 <p>C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111</p>
APVD BY:	A. JENSEN	11/19/2018	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC-UNIBOOT/ LC-UNIBOOT OM4 OFNP 2 mm	
PROPRIETARY AND CONFIDENTIAL		SIZE	REV
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		A	A
		SCALE: NOT TO SCALE	
		SHEET 1 OF 1	