
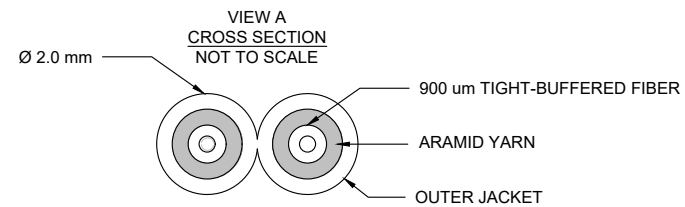



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
6. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M.K.	05/30/2019	A.J

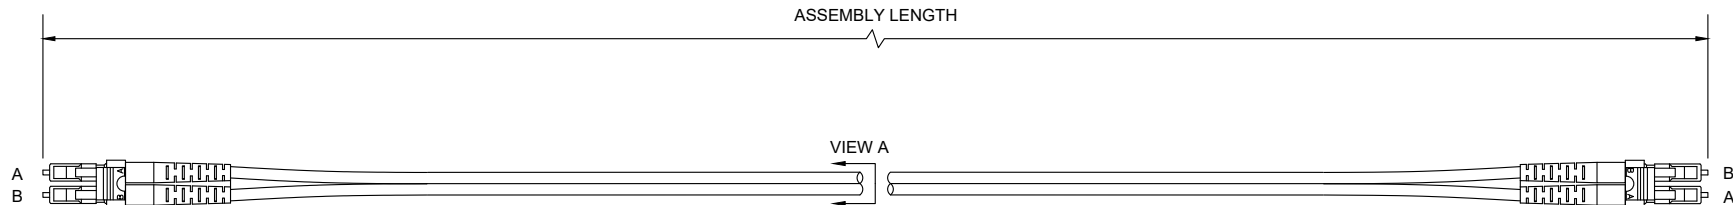

DESCRIPTION: LC-CLIP PC / LC-CLIP PC x 2-FIBER OM3 50 um OFNR 2.0 mm ZIP CABLE					
DRAWN BY:	M. KHANFIR	05/30/2019	 C-ENTERPRISES <i>Connecting Today's Infrastructures</i>	C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111	
APVD BY:	A. JENSEN	05/30/2019		TITLE: LC-CLIP/LC- CLIP ZIP OM3 OFNR 2mm	
DIMENSIONS: METRIC [IMPERIAL]			SIZE	DWG. NO.	REV
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			A	JPSZ02LCLCXXXPX	A
SCALE: NOT TO SCALE				SHEET 1 OF 1	

BILL OF MATERIALS			PC TEST LIMITS AT 1300 nm			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
3	AR	MULTIMODE OM3 ZIP OFNR 2.0 mm CABLE, AQUA: CORNING GLASS AND PRINT, PERFORMA				
1	4	LC-CLIPPED PC POLISH, BEIGE HOUSING, WHITE BOOT: PERFORMA	≤0.75dB	0.20dB	N/A	N/A