
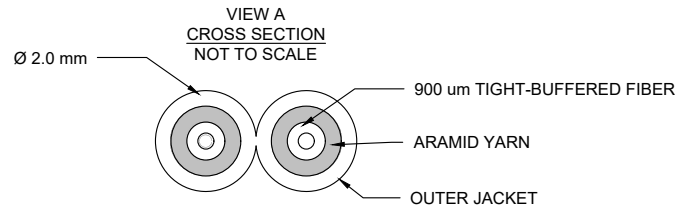


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CLIPPED A-B / B-A.
5. ASSEMBLY USES PERFORMA CABLES AND CONNECTORS.
6. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
7. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	07/11/2019	A.J.

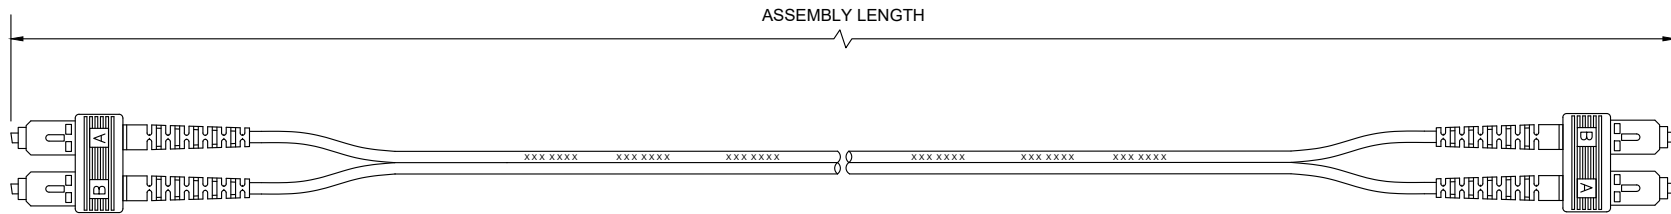

DESCRIPTION: SC-CLIP APC POLISH / SC-CLIP APC POLISH OS2 2.0 mm OFNR ZIP CABLE, PERFORMA

DRAWN BY: M. KHANFIR 07/11/2019

APVD BY: A. JENSEN 07/11/2019



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

DIMENSIONS: METRIC [IMPERIAL]

TITLE: SC-CLIP/SC- CLIP ZIP OS2 OFNR 2mm

PROPRIETARY AND CONFIDENTIAL
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.

SIZE DWG. NO. REV
A SASZ02SCSCXXXPX A

SCALE: NOT TO SCALE

SHEET 1 OF 1

BILL OF MATERIALS			APC TEST LIMITS AT 1310 nm.			
ITEM	QTY	COMPONENT	MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
2	AR	SINGLE-MODE OS2 ZIP OFNR 2 mm BI-SMF 28 ULTRA CABLE, YELLOW: PERFORMA				
1	4	SC-CLIPPED APC POLISH; GREEN HOUSING, GREEN BOOT: PERFORMA	≤0.50dB	0.20dB	≥65dB	68dB