


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
6. ADHESIVE HEAT SHRINK, SECURED ARAMID YARN AND JACKET: 2 PLACES.
7. HEAT SHRINK FOR STRAIN RELIEF: 2 PLACES.

| REV | ECR | DESCRIPTION | BY | DATE | CHECKED |
|-----|-----|-----------------|------|------------|---------|
| A | - | INITIAL RELEASE | M. K | 07/12/2019 | A.J. |

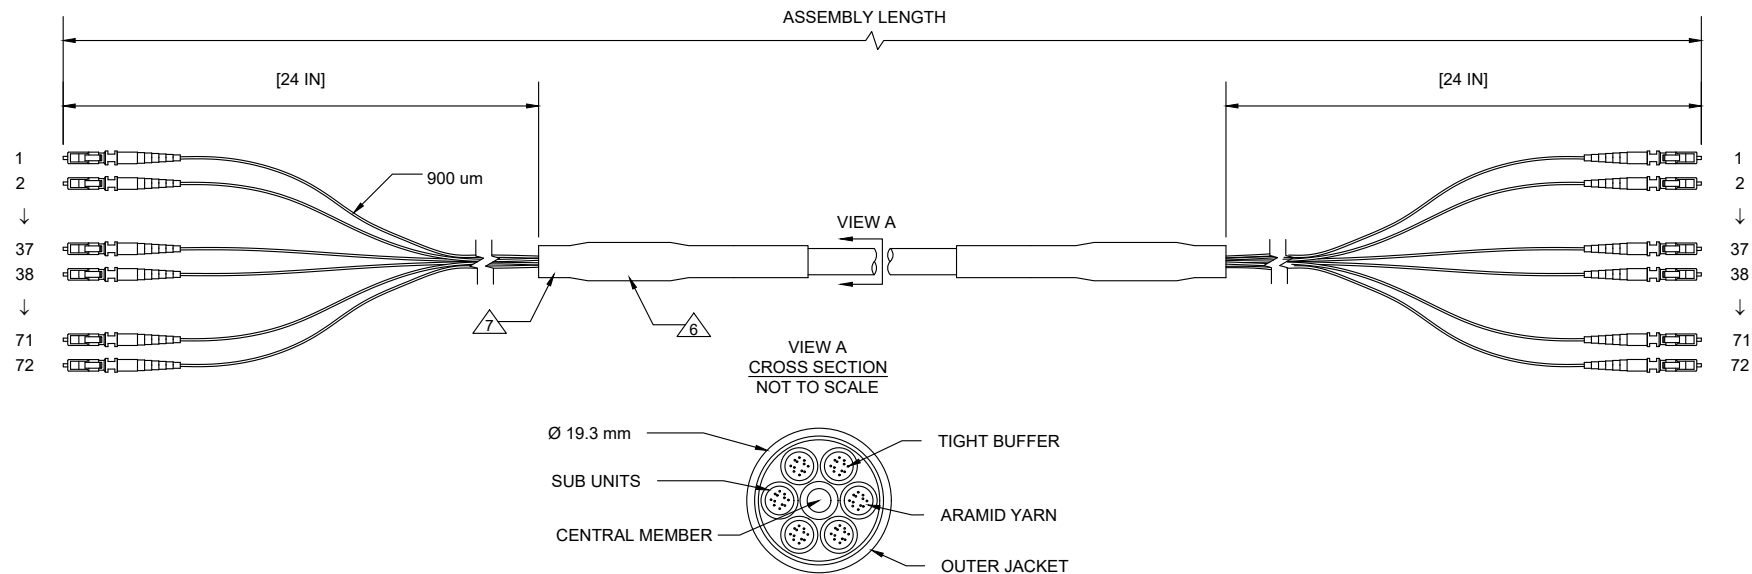

DESCRIPTION: LC-UNCLIPPED PC / LC-UNCLIPPED PC x 72-FIBER OM4 OFNP DIST CABLE, 900 um BREAKOUTS, TEST REPORT, PERFORMA.

| | | |
|-----------|------------|------------|
| DRAWN BY: | M. KHANFIR | 07/12/2019 |
| APVD BY: | A. JENSEN | 07/12/2019 |



C ENTERPRISES
2445 CADES WAY
VISTA CA 92081
760-599-5111

| BILL OF MATERIALS | | |
|-------------------|-----|--|
| ITEM | QTY | COMPONENT |
| 4 | 1 | MULTIMODE PC TEST REPORT. |
| 2 | AR | MULTIMODE OM4 72 FIBER OFNP DIST CABLE; AQUA: PERFORMA. |
| 1 | 144 | LC-UNCLIPPED PC POLISH; BEIGE HOUSING, BLACK BOOT: PERFORMA. |

| MULTIMODE TEST LIMITS AT 1300 nm | | | |
|----------------------------------|-----------|-----------|-----------|
| MAX. I.L. | TYP. I.L. | MIN. R.L. | TYP. R.L. |
| ≤0.75dB | 0.20dB | N/A | N/A |

| | | | |
|--|--------|--------------------------------------|--------------|
| DIMENSIONS: METRIC [IMPERIAL] | | TITLE: LC/LC INDOOR OM4 72 FIBER ASM | |
| PROPRIETARY AND CONFIDENTIAL | SIZE A | DWG. NO. HPPI72LBLB9RXPX | REV A |
| THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED. | | SCALE: NOT TO SCALE | SHEET 1 OF 1 |