
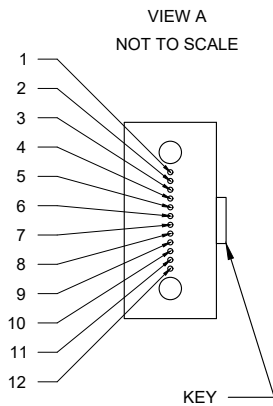



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	K.T.	01/31/2017	A.J.

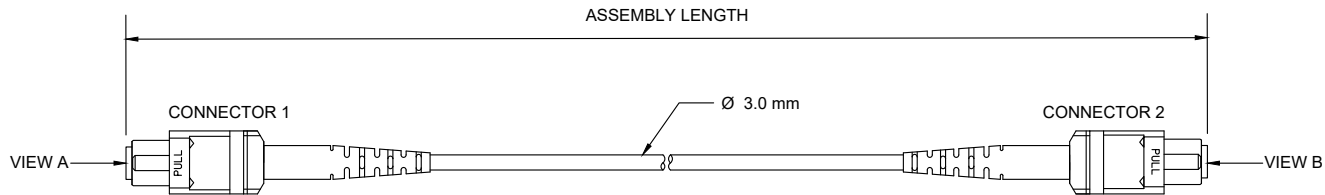


POLARITY TYPE B		
POSITION	FIBER COLOR	POSITION
CONNECTOR 1		CONNECTOR 2
1	BLUE	12
2	ORANGE	11
3	GREEN	10
4	BROWN	9
5	SLATE	8
6	WHITE	7
7	RED	6
8	BLACK	5
9	YELLOW	4
10	VIOLET	3
11	ROSE	2
12	AQUA	1

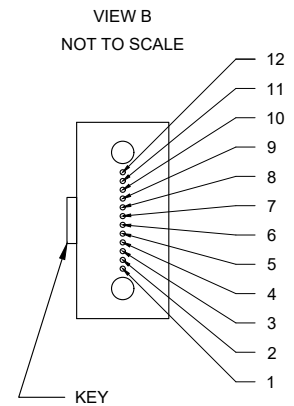

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
3	1	MULTIMODE TEST REPORT
2	AR	MULTIMODE OM4 12-FIBER NON SUB-UNITIZED 3.0 mm OFNP CABLE; AQUA: PERFORMA, CORNING GLASS AND PRINT
1	2	MTP-12 FEMALE MULTIMODE PC POLISH; AQUA HOUSING, AQUA BOOT: CORNING

TEST LIMITS AT 1300 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
<=0.75dB	0.20dB	N/A	25dB

DESCRIPTION: MTP-12 FEMALE PC POLISH/MTP-12 FEMALE PC POLISH x 12-FIBER OM4 OFNP MIC 250 um W/ CP&G FIBER, TEST REPORT, POLARITY TYPE B			
DRAWN BY:	K. THOMAS	01/31/2017	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	01/31/2017	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: MTP-12 OM4 12-FIBER MIC 250 um	
PROPRIETARY AND CONFIDENTIAL		SIZE: A	REV: A
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		DWG. NO.: HPPG12MTMTXRXTX	
		SCALE: NOT TO SCALE	SHEET 1 OF 1