



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.3
3. 100% TESTED FOR OPTICAL PERFORMANCE, END FACE CRITERIA AND CLEANLINESS.
4. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
5. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.

REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	M. K	12/09/2019	A.J

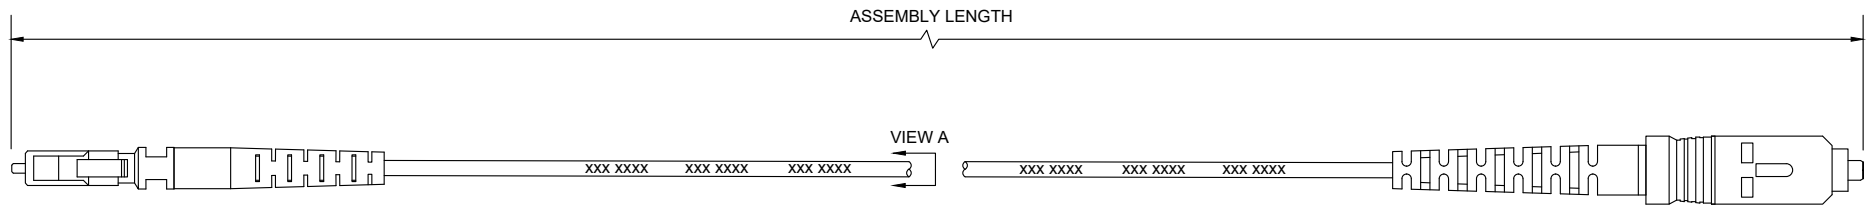


VIEW A
CROSS-SECTION
NOT TO SCALE

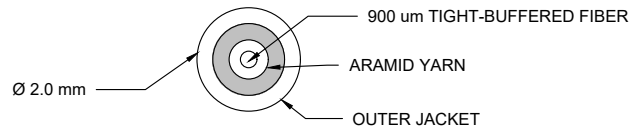

BILL OF MATERIALS		
ITEM	QTY	COMPONENT
4	1	SINGLE-MODE UPC TEST REPORT
3	AR	SINGLE-MODE OS2 OFNR 2 mm SIMPLEX BI-SMF 28 ULTRA CABLE, YELLOW: PERFORMA
2	1	LC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA
1	1	SC-UNCLIPPED UPC POLISH; BLUE HOUSING, BLUE BOOT: PERFORMA

UPC TEST LIMITS AT 1310 nm			
MAX. I.L.	TYP. I.L.	MIN. R.L.	TYP. R.L.
≤0.50dB	0.20dB	≥50dB	60dB

DESCRIPTION: LC UPC POLISH / SC UPC POLISH SINGLE-MODE 2.0 mm SIMPLEX OFNR CABLE, PERFORMA.			
DRAWN BY:	M. KHANFIR	12/09/2019	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	12/09/2019	
DIMENSIONS: METRIC [IMPERIAL]		TITLE: LC/SC SINGLE-MODE 2.0 mm SIMPLEX	
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.		SIZE A	DWG. NO. SUSS01LBSBXRXPX
		SCALE: NOT TO SCALE	REV A
		SHEET 1 OF 1	