





NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND COMPONENTS ARE RoHS/REACH COMPLIANT.
2. CONNECTORS MEET THE REQUIREMENTS OF ANSI/TIA 568-C.2.
3. CABLE ASSEMBLIES ARE MANUFACTURED TO C ENTERPRISES STANDARDS.
4. STANDARDS AND SPECIFICATIONS AVAILABLE UPON REQUEST.
5. REFER TO PART NUMBER CHART FOR COMPLETE LIST OF OPTIONS.
6. CABLE SPECIFICATIONS: CAT6 / 600 MHZ, 4 PAIR, 24AWG, UTP, CMR.
7. COMPONENTS MEET OR EXCEED CAT6.
8. DEPICTED CONNECTORS APPLY TO CAT6 CHANNEL (QC) PATCH CORDS.
9. WIRING CONFIGURATION:
 - 9.1. DEFAULT: 568B STRAIGHT.
 - 9.2. INDUSTRY STANDARD / CUSTOM WIRING AVAILABLE.
10. TESTED FOR CONTINUITY, SHORTS, WIRE MAPPING AND OVERALL INTEGRITY.
11. INDUSTRY STANDARD COLORS AVAILABLE ON CABLE AND STRAIN RELIEF BOOT.


REV	ECR	DESCRIPTION	BY	DATE	CHECKED
A	-	INITIAL RELEASE	J.C.	10/17/2011	-
B	-	DRAWING TEMPLATE AND BLOCK UPDATE	K.T.	07/26/2016	A.J.

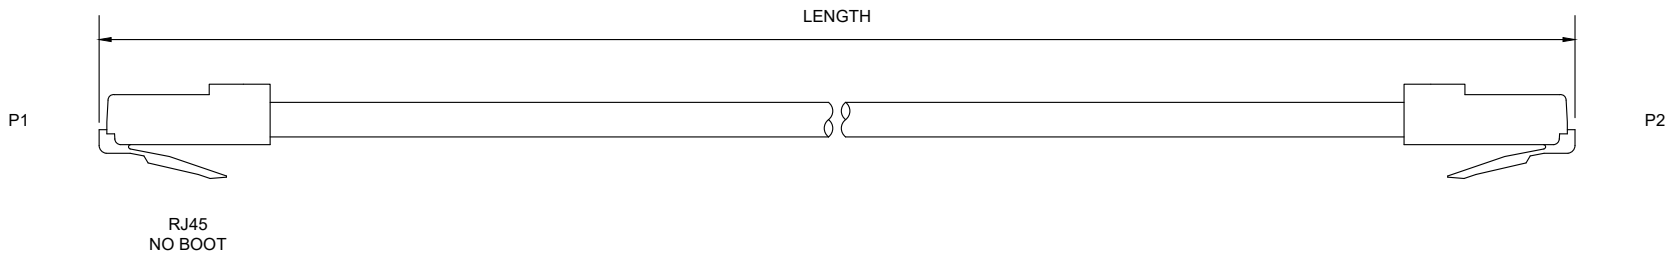

STRAIN RELIEF BOOT OPTIONS

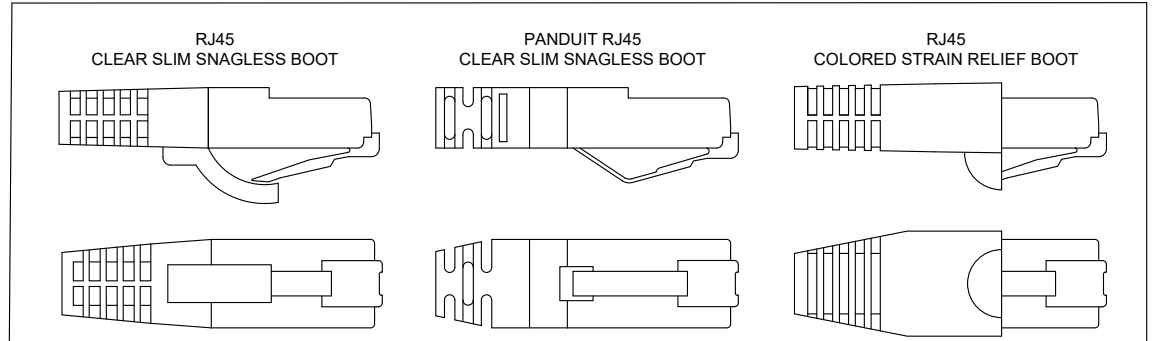

WIRING CONFIGURATION 568B STRAIGHT		
P1	COLOR CODE	P2
1	WHITE/ORANGE	1
2	ORANGE/WHITE	2
3	WHITE/GREEN	3
4	BLUE/WHITE	4
5	WHITE/BLUE	5
6	GREEN/WHITE	6
7	WHITE/BROWN	7
8	BROWN/WHITE	8

DRAWN BY:	K. THOMAS	07/05/2016	 C ENTERPRISES 2445 CADES WAY VISTA CA 92081 760-599-5111
APVD BY:	A. JENSEN	07/26/2016	
DIMENSIONS: METRIC [IMPERIAL]			TITLE: CAT6 CHANNEL PATCH CORD
PROPRIETARY AND CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF C ENTERPRISES. NOT TO BE USED, COPIED, OR DISCLOSED WITHOUT WRITTEN PERMISSION. ALL RIGHTS RESERVED.			SIZE A
			DWG. NO. CAT6-QC-PATCH-CORD
			REV B
SCALE: NOT TO SCALE			SHEET 1 OF 1